

30

POLE GAIN LINE POST	
HORIZONTAL MOUNTING	
88 Kv	CAT. NO. 62359
ANSI CLASS 57-36	

- 1 ENG. MGR.
- 2 ENG.
- PURCH.
- 1 MKTG.
- COST
- PROD.
- INSP.
- GLAZE
- BUSHING
- MAKING
- SHIP.
- ASSEM.
- MODEL
- MACH.
- 45
- TOOLING
- CER. LAB.
- 1 EL. LAB.
- 1 E.MEDIA

DIMENSIONS

LEAKAGE DISTANCE	IN	53
DRY ARCING DISTANCE	IN	19 $\frac{1}{4}$

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	2,800
---------------------	----	-------

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY	kV	180
60 HERTZ FLASHOVER-WET	kV	150
IMPULSE FLASHOVER-POS.	kV	300

RADIO INFLUENCE VOLTAGE DATA


60 HERTZ TEST VOLTAGE	kV	44
RMS TO GROUND	μ V	200
MAXIMUM RIV @ 1000 kHz		

PACKING INFORMATION

NET WEIGHT PER 100	LB	7700
PACKED WEIGHT PER 100	LB	8200
NO. IN STANDARD PACKAGE		1

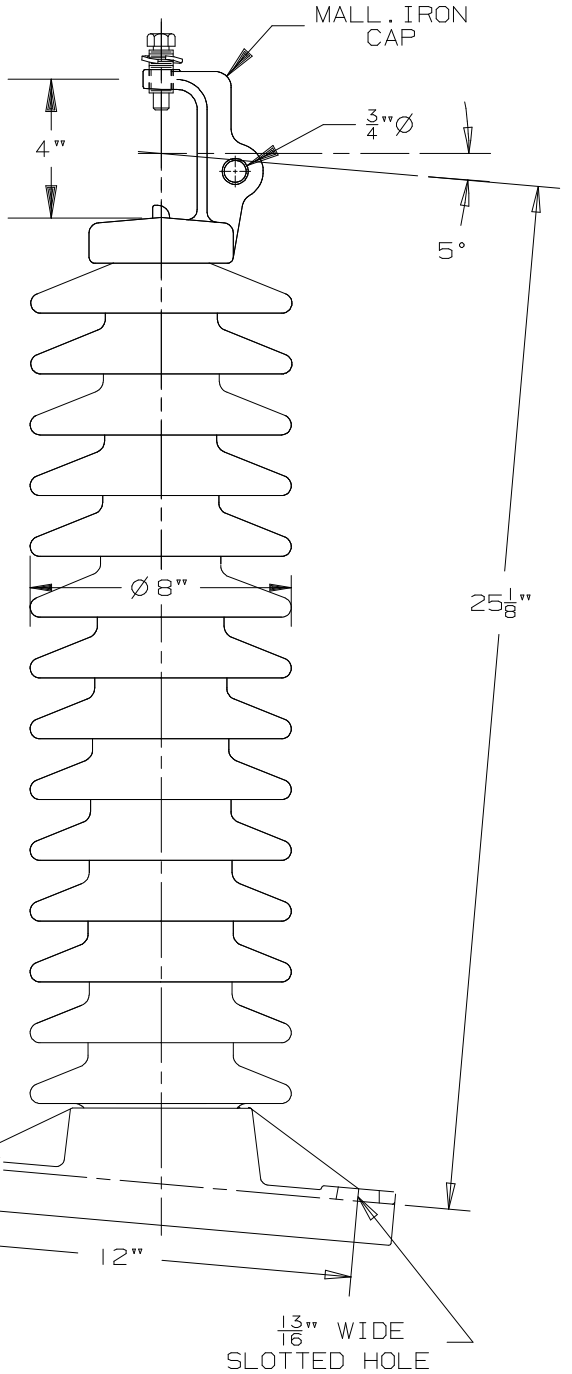

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE REPRODUCED, COPIED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

	Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (716)924-2127	62359
	5-22-98 TM PAP RG	