

30

STATION POST	
CAT. NO. 14PA58	
900 kV	230 kV BIL
SOLID CORE	

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE IN 198

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	3,500
TENSION STRENGTH	LB	25,000
TORSION STRENGTH	IN-LB	90,000
COMPRESSION STRENGTH	LB	90,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS.	kV	1,010
60 HERTZ WITHSTAND-WET	kV	385
IMPULSE WITHSTAND	kV	900


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GRD.	kV	146
MAXIMUM RIV @ 1000 kHz	kV	500

PACKING INFORMATION

NET WEIGHT, COLUMN	LB	400
PACKED WEIGHT, COLUMN	LB	450
NO. IN STANDARD PACKAGE		1

4 HOLES
 $\phi \frac{5}{8}'' - 11 +.015$ ON 5" B.C.

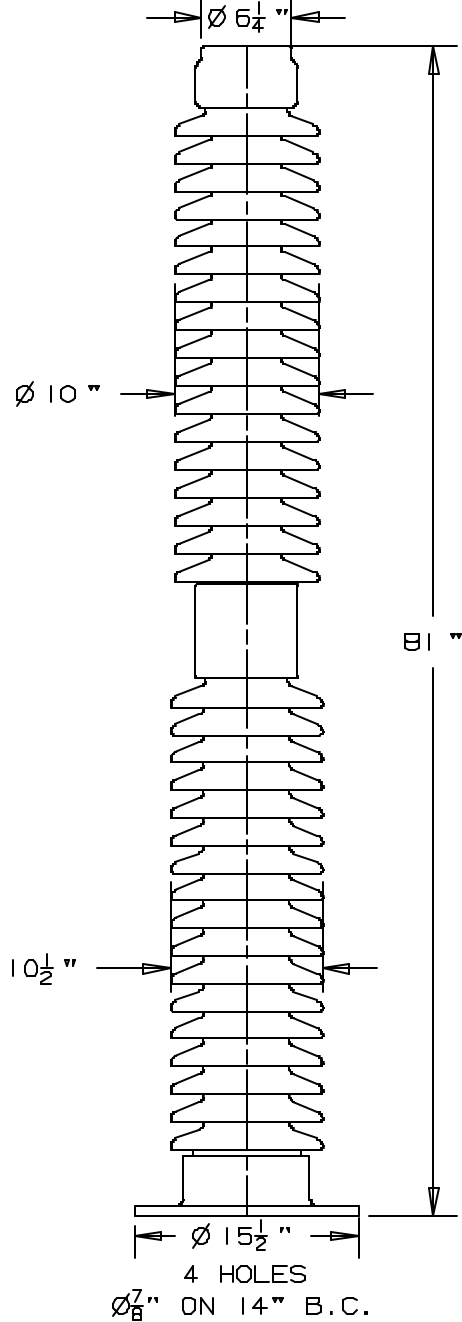

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: 14PA58

	Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (585) 924-2127	14PA58
	03-14-05 TM	