

This drawing is the property of Victor Insulators, Inc. and contains proprietary and confidential information which must not be duplicated, used, or disclosed other than as expressly authorized by Victor Insulators, Inc.

Eng Mgr: 1
 Eng: 2
 Purch: 1
 Mktg: 1
 Supl:
 Cost:
 Prod:
 Insp:
 Glazing:
 Bushing:
 Making:
 Ship:
 Assm:
 Model:
 Mach: 45
 Tooling:
 Cor Lab: 1
 El Lab: 1
 O.A.

DWN. G.J.R.	5-10-91	3A
12-18-84	2-12-91	3A
APR. 435	3-8-89	MM

Victor Insulators, Inc.
 280 Maple Avenue
 Mail: P.O. Box B, Victor, New York 14564
 Telephone: (716) 924-2127



17PA27

NET WEIGHT
 LB 240
 PACKED WEIGHT
 LB 260
 NO. IN STD. PACKAGE
 1

PACKING INFORMATION

60 HERTZ TEST VOLTAGE TO GRD.
 KV 103
 MV 200
 MAXIMUM RIV @ 1000 KHZ

RADIO INFLUENCE VOLTAGE DATA

IMPULSE FLASHOVER - POS.
 KV 810
 60 HERTZ WITHSTAND - WET
 KV 315
 IMPULSE WITHSTAND
 KV 750

ELECTRICAL VALUES


CANTILEVER STRENGTH
 LB 1,850
 TENSION STRENGTH
 LB 25,000
 TORSION STRENGTH
 IN-LB 90,000
 COMPRESSION STRENGTH
 LB 75,000

MECHANICAL VALUES

LEAKAGE DISTANCE
 IN 132

DIMENSIONS

4 HOLES EACH END
 5/8-11 +.015" ON 5" B.C.
 6 1/2 D.

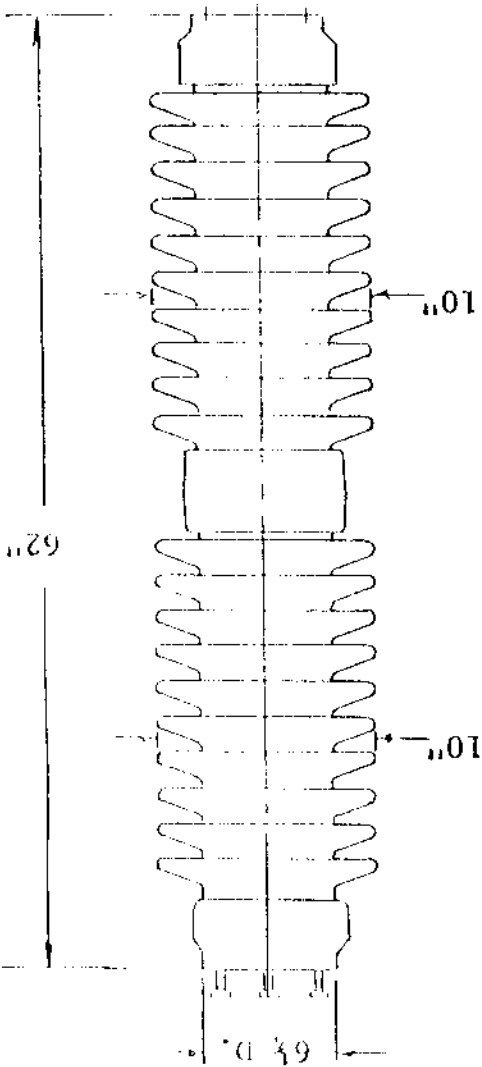

STATION POST	CAT. NO. 17PA27	161 KV 750 KV BIL	TR. NO. 295
--------------	-----------------	-------------------	-------------