

STATION POST	
CAT. NO. 17PA28-33	
230 kV	900 kV BIL

4 HOLES  
.562 DIA. ON 10 3/8" B.C.

DIMENSIONS

LEAKAGE DISTANCE                      IN      165

MECHANICAL VALUES

CANTILEVER STRENGTH                      LB      1,450  
TENSION STRENGTH                              LB      25,000  
TORSION STRENGTH                              IN-LB   90,000  
COMPRESSION STRENGTH                      LB      75,000

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS.                      kV      1,010  
60 HERTZ WITHSTAND-WET                      kV      385  
IMPULSE WITHSTAND                              kV      900

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GRD.              kV      146  
MAXIMUM RIV @ 1000 kHz                      μV      500

PACKING INFORMATION

NET WEIGHT, STACK                              LB      290  
PACKED WEIGHT, STACK                              LB      320  
NO. IN STD. PACKAGE                              1

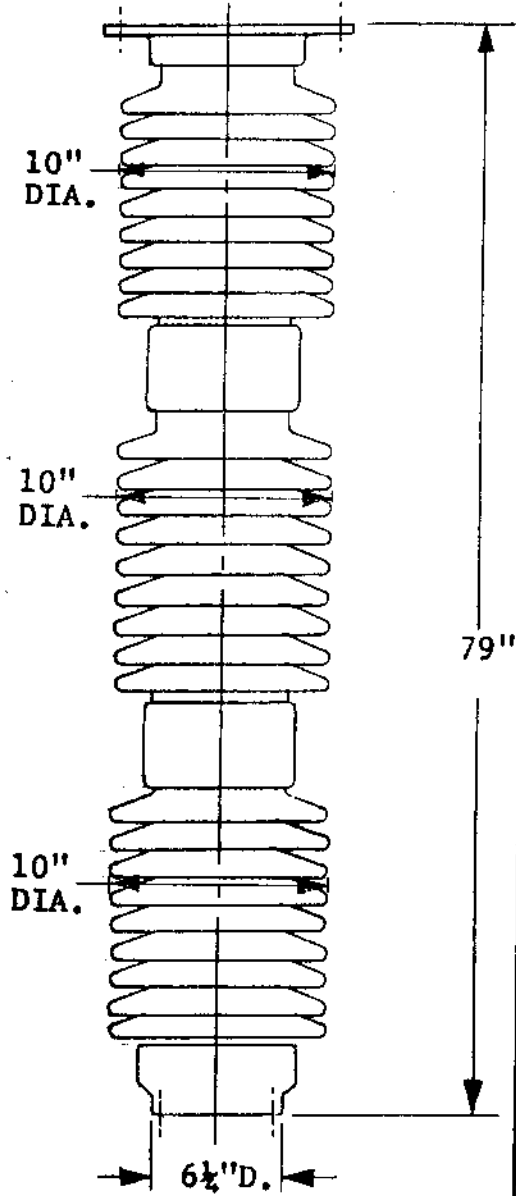

4 HOLES  
5/8-11 +.015" ON 5" B.C.

*BA*  
*7-1-91*

RU 17PA28-33

DWN. B.A.  
5-18-89  
APP. *me* *AV*

**V** Victor Insulators, Inc.  
290 Maple Avenue  
Mail: P.O. Box 8, Victor, New York 14564  
Telephone: (716) 924-2127

17PA28-33