25

SUSPENSION INSULATOR

CAT. NO. 850

DIMENSIONS

LEAKAGE DISTANCE	IN	10.5
DRY ARCING DISTANCE	IN	6

MECHANICAL VALUES

M & E STRENGTH	LB	15,000
IMPACT STRENGTH	IN-LB	50
TIME LOAD TEST VALUE	LB	10,000
ROUTINE PROOF TEST LOAD	LB	7,500

ELECTRICAL VALUES

60 HERTZ FLASHOVER-DRY	kV	80
60 HERTZ FLASHOVER-WET	kV	50
IMPULSE FLASHOVER-POS	kV	125
IMPULSE FLASHOVER-NEG	kV	130
60 HERTZ PUNCTURE VOLTAGE	kV	110

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	10
MAXIMUM RIV @ 1000 kHz	μV	50

PACKING INFORMATION

NET WEIGHT , PER 100	LB	750
PACKED WEIGHT , PER 100	LB	775
NO. IN STANDARD PACKAGE		9

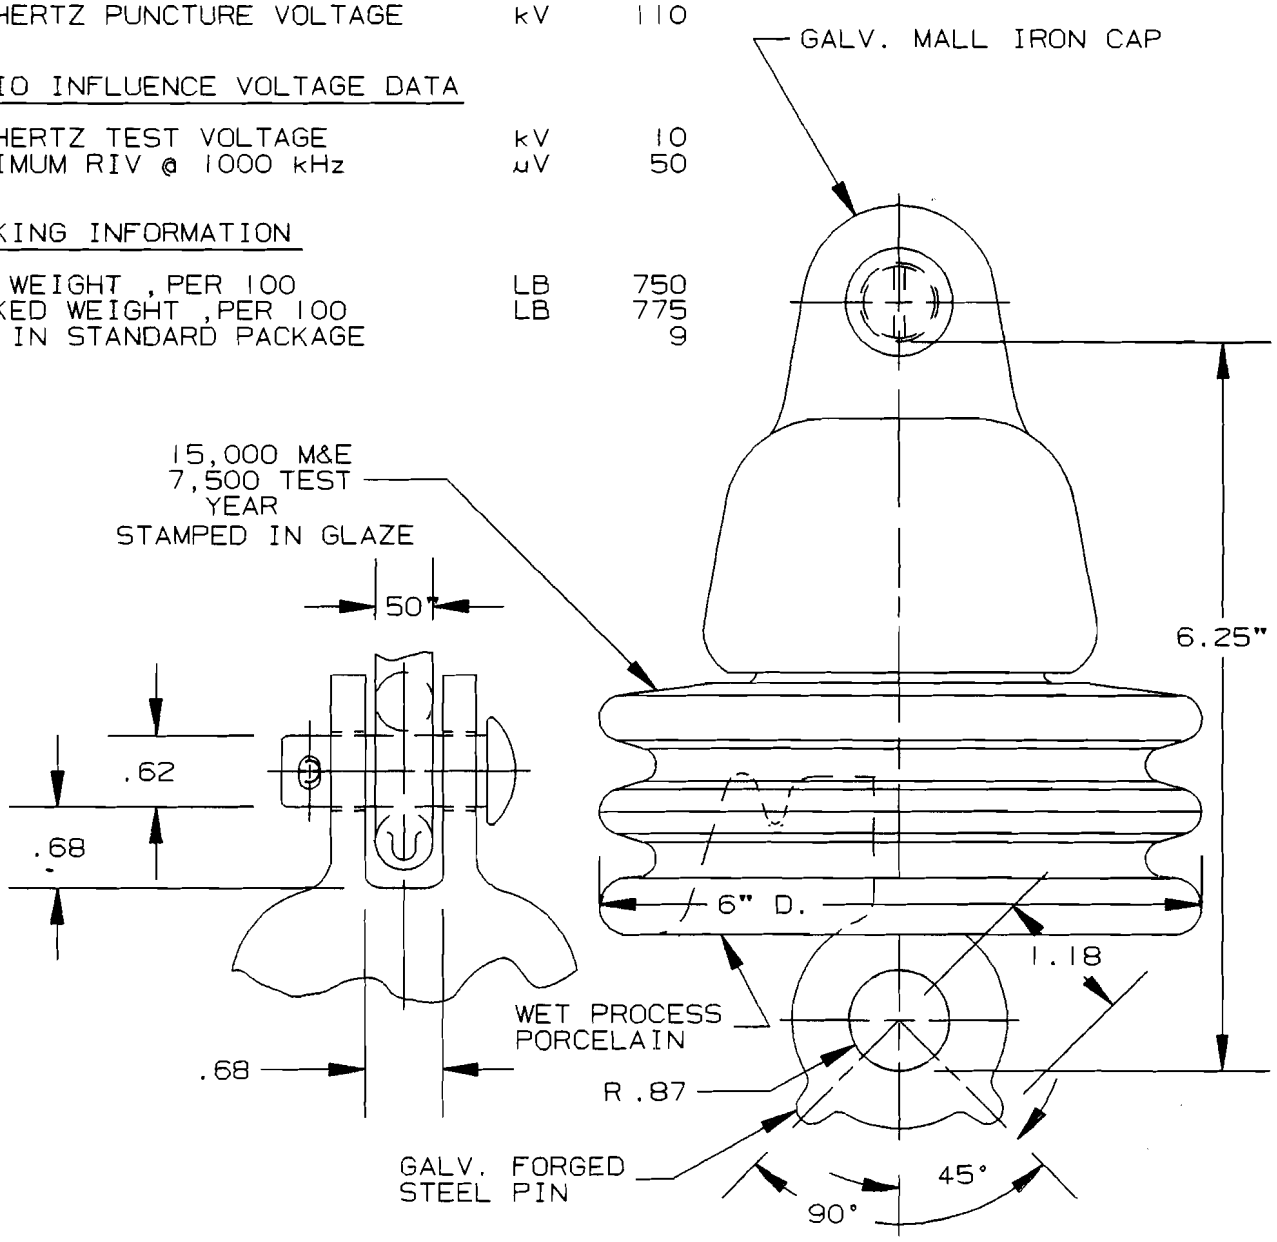

ENG. MGR
2 ENG
PURCH.
MKTG.
PLT.MGR.
COST
PROD.
INSP
GLAZE
BUSHING
MAKING
SHIP
ASSEM
MODEL
MACH.
45
TOOLING
CER LAB
EL LAB
Q. A.

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

Victor Insulators, Inc.
280 MAPLE AVENUE
VICTOR, NEW YORK 14564
TELEPHONE: (716)924-2127

850

12-23-96 MM

SUPERSEDES 850 DATED 8-5-91

FILE: 850