

30

FILE: 1544

STATION POST

CAT. NO. 1544

15 kV 110 kV BIL

TR NO. 4

DIMENSIONS

LEAKAGE DISTANCE IN 12 mm 304

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	2,000	kN	8.9
TENSION STRENGTH	LB	5,000	kN	22.2
TORSION STRENGTH	IN-LB	7,000	kN-M	.791
COMPRESSION STRENGTH	LB	10,000	kN	44.5

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS.	kV	125
60 HERTZ WITHSTAND-WET	kV	45
IMPULSE WITHSTAND	kV	110

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	10
MAXIMUM RIV @ 1000 kHz	μ V	50

PACKING INFORMATION

NET WEIGHT, EACH	LB	22	kg	9.97
PACKED WEIGHT, EACH	LB	27	kg	12.24
NO. IN STANDARD PACKAGE		2		

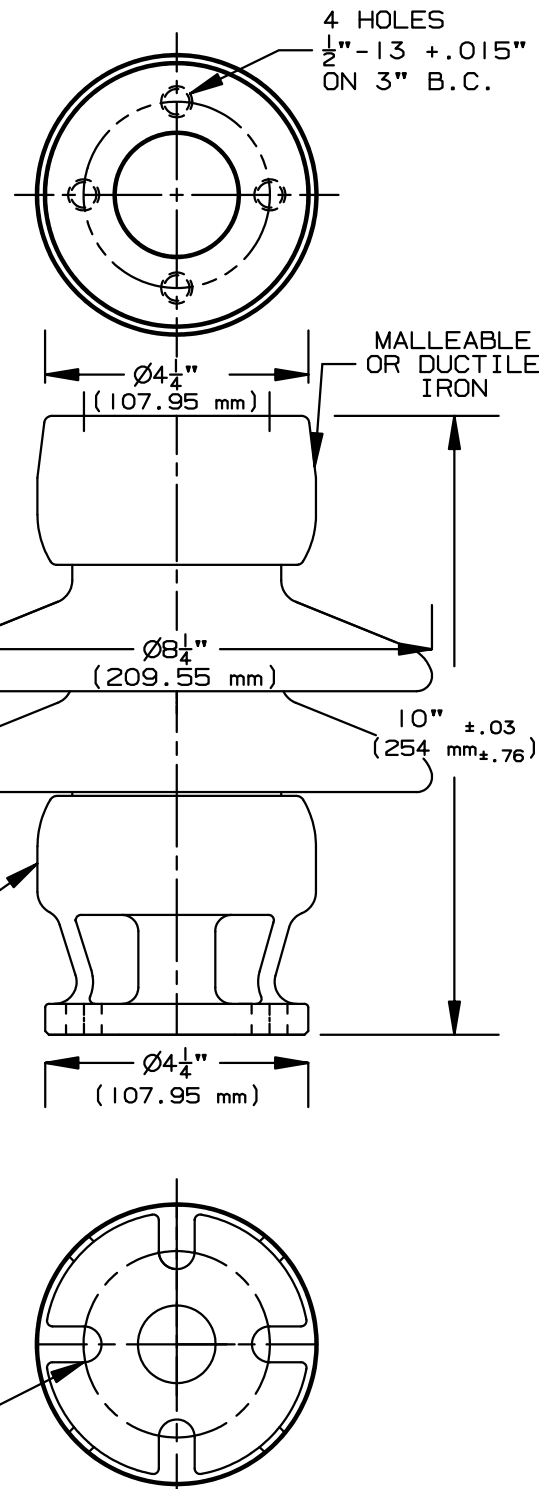

APPROVED
By A. E. Schwalm at 6:57 am, Oct 21, 2010

05-26-10		TM	B
12-18-03	TM	AS	A
05-29-01		PP	



Victor Insulators, Inc.
280 MAPLE AVENUE
VICTOR, NEW YORK 14564
TELEPHONE: (585)924-2127

1544

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.