

30

STATION POST	
CAT. NO. 15PA41	
230 kV	1050 kV BIL

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 198

(4) TAPPED HOLES
5/8-11 +.015 ON 5" B.C.

MECHANICAL VALUES

CANTILEVER STRENGTH LB 750
 TENSION STRENGTH LB
 TORSION STRENGTH IN-LB
 COMPRESSION STRENGTH LB

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS. kV
 60 HERTZ WITHSTAND-WET kV
 IMPULSE WITHSTAND kV

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV
 MAXIMUM RIV @ 1000 kHz μ V


PACKING INFORMATION

NET WEIGHT, LB
 PACKED WEIGHT, LB
 NO. IN STANDARD PACKAGE

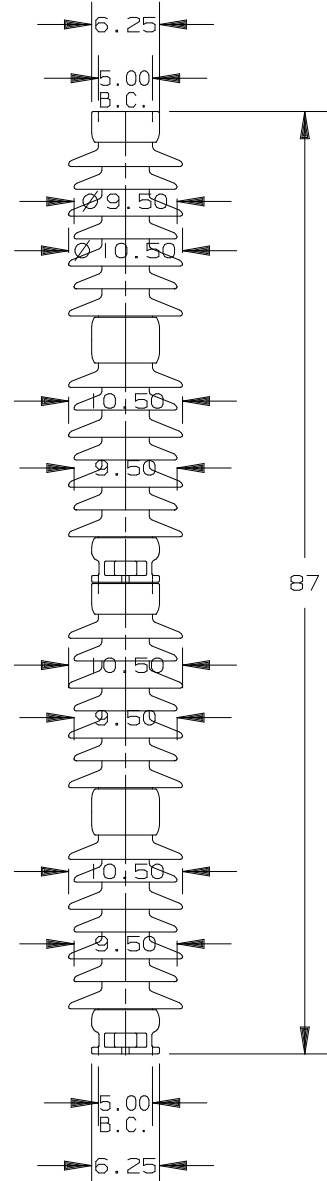

(4) SLOTTED HOLES
.68" DIA. ON 5" B.C.

THIS DRAWING IS THE PROPERTY OF
 VICTOR INSULATORS, INC. AND CONTAINS
 PROPRIETARY AND CONFIDENTIAL INFORMATION
 WHICH MUST NOT BE DUPLICATED, USED,
 OR DISCLOSED OTHER THAN AS EXPRESSLY
 AUTHORIZED BY VICTOR INSULATORS, INC.

	Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (716)924-2127	15PA41
	10-30-97 FD AS	