

30

STATION POST
CAT. NO. 15PA39

ENG. MGR
ENG
PURCH.
MKTG.
PLT. MGR.
COST
PROD.
INSP
GLAZE
BUSHING
MAKING
SHIP
ASSEM
MODEL
MACH.
45
TOOLING
CER LAB
EL LAB
Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 132

MECHANICAL VALUES

CANTILEVER STRENGTH LB 2,000
TENSION STRENGTH LB 25,000
TORSION STRENGTH IN-LB 90,000
COMPRESSION STRENGTH LB 75,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS. kV 810
60 HERTZ WITHSTAND-WET kV 315
IMPULSE WITHSTAND kV 750


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 103
MAXIMUM RIV @ 1000 kHz μ V 500

PACKING INFORMATION

NET WEIGHT, EACH LB 208
PACKED WEIGHT, EACH LB 224
NO. IN STANDARD PACKAGE 1


5/8-11 + .015 ON 5" B.C.

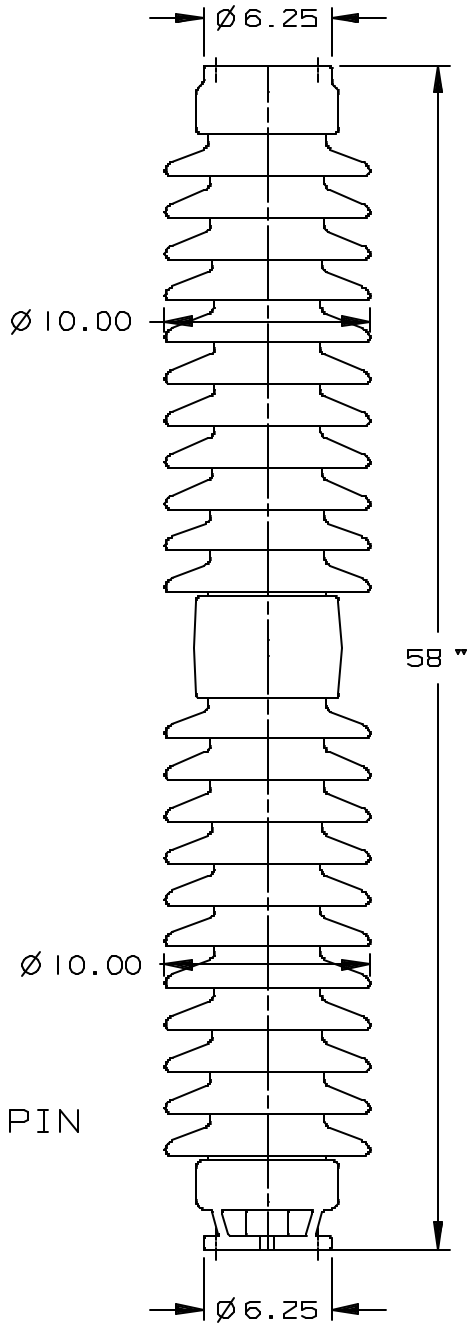

REPLACEMENT FOR TR 174 CAP & PIN

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

01-30-03	TM	RG
01-10-97	RR	PP AS

 Victor Insulators, Inc.
280 MAPLE AVENUE
VICTOR, NEW YORK 14564
TELEPHONE: (716)924-2127

15PA39

15PA39