

30

STATION POST	
CAT. NO. 1735, 1735-31	
23kV	150KV BIL

1 ENG. MGR
 2 ENG
 PURCH.
 1 MKTG.
 PLT. MGR.
 COST
 PROD.
 INSP
 GLAZE
 BUSHING
 MAKING
 SHIP
 ASSEM
 MODEL
 MACH.
 45
 TOOLING
 CER LAB
 EL LAB
 Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 24

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT	LB	475
CANTILEVER STRENGTH, UNDERHUNG	LB	475
TENSION STRENGTH	LB	5,000
TORSION STRENGTH	IN-LB	5,000
COMPRESSION STRENGTH	LB	10,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS.	KV	160
IMPULSE WITHSTAND	KV	150
60 HERTZ WITHSTAND-WET	kV	75

2 GALVANIZED STUDS EACH END
3/8"-16 ON 2.25" B.C.

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GROUND	KV	15
MAXIMUM RIV AT 1000 KHZ	Ku	100

FIG. A 1735 FIG. B 1735-31

PACKING INFORMATION

NET WEIGHT, EACH	LB	16
PACKED WEIGHT, EACH	LB	16.5
NO. IN STD. PACKAGE		105

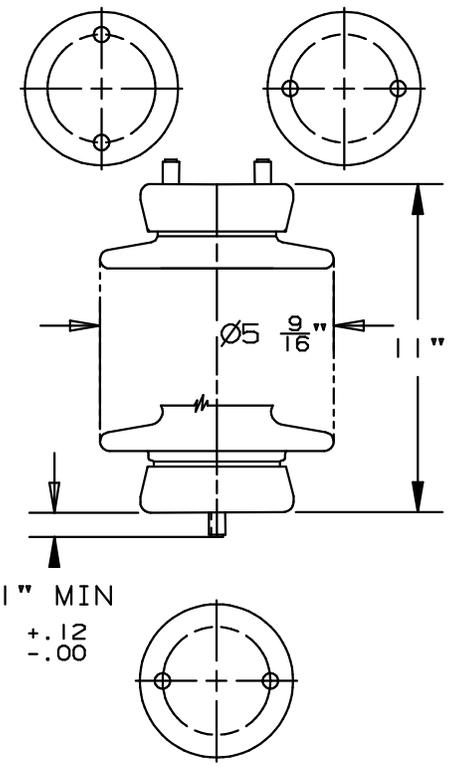


FIG. A & B

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwalm at 7:07 am, Apr 17, 2013

 Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (585)924-2127

1735(FIG. A)
 1735-31(FIG. B)

04-16-13 TM