

30

STATION POST  
 CAT. NO. 1739, 1739-31  
 23 kV                      150 kV BIL

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- Q. A.

DIMENSIONS



LEAKAGE DISTANCE                      IN    24.37

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT	LB	800
CANTILEVER STRENGTH, UNDERHUNG	LB	800
TENSION STRENGTH	LB	5,000
TORSION STRENGTH	IN-LB	5,000
COMPRESSION STRENGTH	LB	10,000

FIG. A  
(1739)

FIG. B  
(1739-31)



ELECTRICAL VALUES

IMPULSE FLASHOVER-POS.	kV	170
60 HERTZ WITHSTAND-WET	kV	60
IMPULSE WITHSTAND	kV	150

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	15
MAXIMUM RIV @ 1000 KHZ	μV	100

2 STUDS EACH END  
 3/8-16 ON 2.25 B.C.

PACKING INFORMATION

NET WEIGHT, EACH	LB	13.9
PACKED WEIGHT, EACH	LB	14.5
NO. IN STANDARD PACKAGE		105

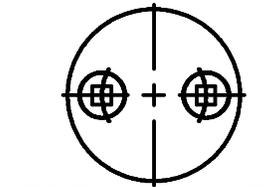

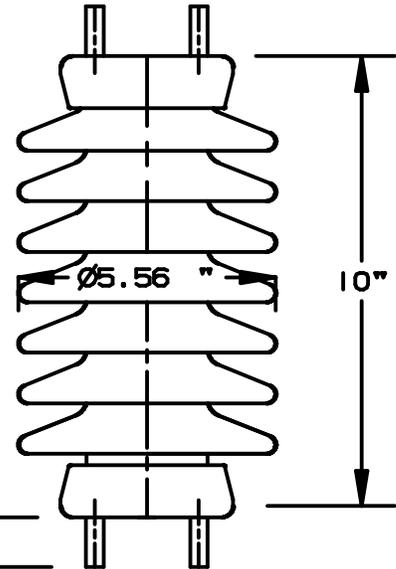


FIG. A & B

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE REPRODUCED, COPIED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

4-1-02

TM

RG



**Victor Insulators, Inc.**  
 280 MAPLE AVENUE  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (716)924-2127

1739 & 1739-31