

30

STATION POST
CAT. NO. 1741
15 kV 110 kV BIL

- Eng. Mgr. 1
- Eng. 2
- Purch.
- Mktg. 1
- Supt.
- Cost
- Prod.
- Insp.
- Glazing
- Bushing
- Making
- Ship
- Assem.
- Model
- Mach.
- 45
- Tooling
- Cer. Lab.
- El. Lab. 1
- O.A.

DIMENSIONS

LEAKAGE DISTANCE IN 15

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT LB 1,400
 CANTILEVER STRENGTH, UNDERHUNG LB 1,400
 TENSION STRENGTH LB 15,000
 TORSION STRENGTH IN-LB 10,000
 COMPRESSION STRENGTH LB 50,000

ELECTRICAL VALUES

IMPULSE FLASHOVER - POS. kV 125
 60 HERTZ WITHSTAND- WET kV 45
 IMPULSE WITHSTAND kV 110


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GRD. kV 10
 MAXIMUM RIV @ 1000 kHz μ V 50

PACKING INFORMATION

NET WEIGHT, EACH LB 20
 PACKED WEIGHT, EACH LB 24
 NO. IN STANDARD PACKAGE 3

4 HOLES EACH END
 $\frac{1}{2}$ -13 +.015" ON 3" BC

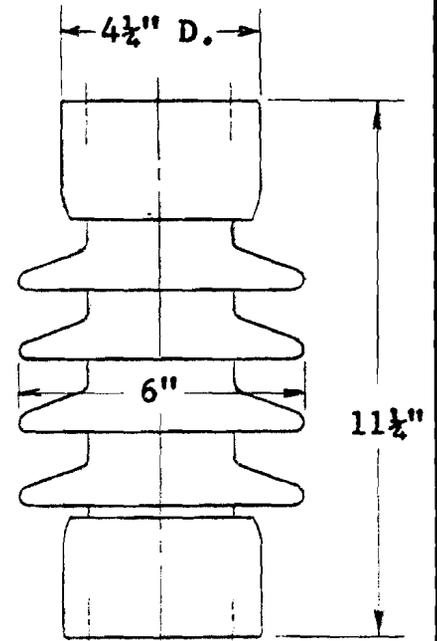

This drawing is the property of Victor Insulators, Inc. and contains proprietary and confidential information which must not be duplicated, used, or disclosed other than as expressly authorized by Victor Insulators, Inc.

DWN. G.J.R.
8-28-84
APP. <i>AES</i>

	Victor Insulators, Inc.
	280 Maple Avenue
	Mail: P.O. Box B, Victor, New York 14564
	Telephone: (716) 924-2127

1741