30

STATION POST
CAT. NO. 1742
23 kV 150 kV BIL

Eng. Mgr. 1
Eng. 2
Purch.
Mktg. 1
Supt.
Cost
Prod.
Insp.
Glazing
Bushing
Making
Ship
Assem.
Model
Mach.
45
Tooling
Cer. Lab.
El. Lab. 1
Q.A.

DIMENSIONS

LEAKAGE DISTANCE	IN	24

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT	LB	1,000
CANTILEVER STRENGTH, UNDERHUNG	LB	1,000
TENSION STRENGTH	LB	15,000
TORSION STRENGTH	IN-LB	10,000
COMPRESSION STRENGTH	LB	50,000

4 HOLES EACH END
½-13 +.015" ON 3" BC

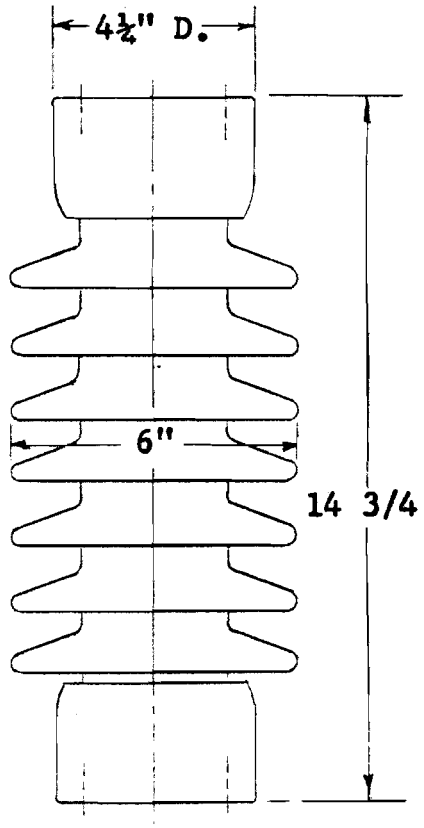

ELECTRICAL VALUES

IMPULSE FLASHOVER - POS.	kV	170
60 HERTZ WITHSTAND- WET	kV	60
IMPULSE WITHSTAND	kV	150

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GRD.	kV	15
MAXIMUM RIV @ 1000 kHz	µV	100

PACKING INFORMATION

NET WEIGHT, EACH	LB	27
PACKED WEIGHT, EACH	LB	30
NO. IN STANDARD PACKAGE		2

This drawing is the property of Victor Insulators, Inc. and contains proprietary and confidential information which must not be duplicated, used, or disclosed other than as expressly authorized by Victor Insulators, Inc.

FILE 1742

DWN. G.J.R.
8-29-84
AES

Victor Insulators, Inc.
280 Maple Avenue
Mail: P.O. Box B, Victor, New York 14564
Telephone: (716) 924-2127

1742

SUPERSEDES DWG. 8538 DATED 2-26-71