

30

STATION POST

CAT. NO. 1743

34.5kV

200KV BIL

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 36 1/2

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT	LB	800
CANTILEVER STRENGTH, UNDERHUNG	LB	800
TENSION STRENGTH	LB	15,000
TORSION STRENGTH	IN-LB	10,000
COMPRESSION STRENGTH	LB	50,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS.	kV	225
IMPULSE WITHSTAND	kV	200
60 HERTZ WITHSTAND-WET	kV	80


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GROUND	kV	22
MAXIMUM RIV @ 1000 kHz	µV	100

PACKING INFORMATION

NET WEIGHT, EACH	LB	35
PACKED WEIGHT, EACH	LB	38
NO. IN STD. PACKAGE		2

4 HOLES EACH END  
1/2-13 +.015" ON 3" B.C.

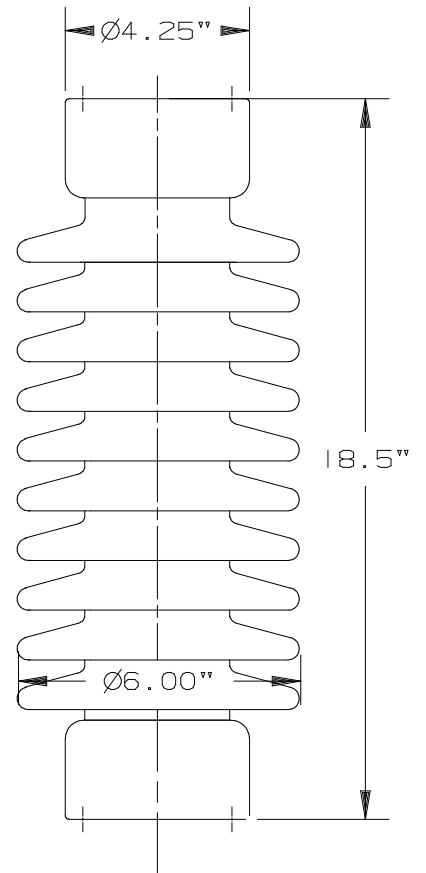

THIS DRAWING IS THE PROPERTY OF  
 VICTOR INSULATORS, INC. AND  
 CONTAINS PROPRIETARY AND CONFIDENTIAL  
 INFORMATION WHICH MUST NOT BE DUPLICATED,  
 USED, OR DISCLOSED OTHER THAN  
 AS EXPRESSLY AUTHORIZED BY  
 VICTOR INSULATORS, INC.



Victor Insulators, Inc.

280 MAPLE AVENUE  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (716)924-2127

1743

REDRAWN 01-08-96 MM PP RG

SUPERSEDES 1743 DATED 8-24-84