

30

STATION POST

CAT. NO. 1744

46kV

250KV BIL

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 40 1/2

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT	LB	700
CANTILEVER STRENGTH, UNDERHUNG	LB	700
TENSION STRENGTH	LB	15,000
TORSION STRENGTH	IN-LB	10,000
COMPRESSION STRENGTH	LB	50,000

4 HOLES EACH END
1/2-13 +.015" ON 3" B.C.

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS.	kV	280
IMPULSE WITHSTAND	kV	250
60 HERTZ WITHSTAND-WET	kV	100

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GROUND	kV	30
MAXIMUM RIV @ 1000 kHz	μV	200

PACKING INFORMATION

NET WEIGHT, EACH	LB	40
PACKED WEIGHT, EACH	LB	45
NO. IN STD. PACKAGE		2

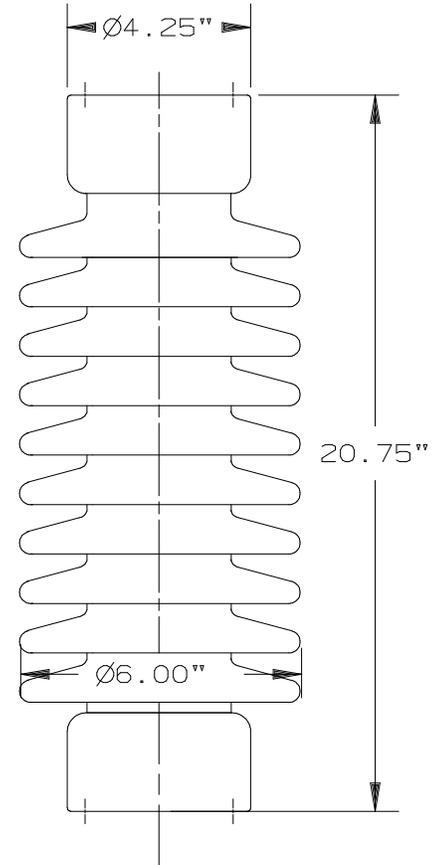

THIS DRAWING IS THE PROPERTY OF
 VICTOR INSULATORS, INC. AND
 CONTAINS PROPRIETARY AND CONFIDENTIAL
 INFORMATION WHICH MUST NOT BE DUPLICATED,
 USED, OR DISCLOSED OTHER THAN
 AS EXPRESSLY AUTHORIZED BY
 VICTOR INSULATORS, INC.



Victor Insulators, Inc.

280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (716)924-2127

1744

REDRAWN 01-08-96

MM PP RG

SUPERSEDES 1744 DATED 8-30-84