

STATION POST

CAT. NO. 1745

69 kV

350 kV BIL

30

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 68.5

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT LB 450
 CANTILEVER STRENGTH, UNDERHUNG LB 450
 TENSION STRENGTH LB 15,000
 TORSION STRENGTH IN-LB 10,000
 COMPRESSION STRENGTH LB 50,000

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS. kV 390
 60 HERTZ WITHSTAND-WET kV 145
 IMPULSE WITHSTAND kV 350

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GRD. kV 44
 MAXIMUM RIV @ 1000 kHz μ V 200

PACKING INFORMATION

NET WEIGHT, EACH LB 54
 PACKED WEIGHT, EACH LB 64
 NO. IN STANDARD PACKAGE 1

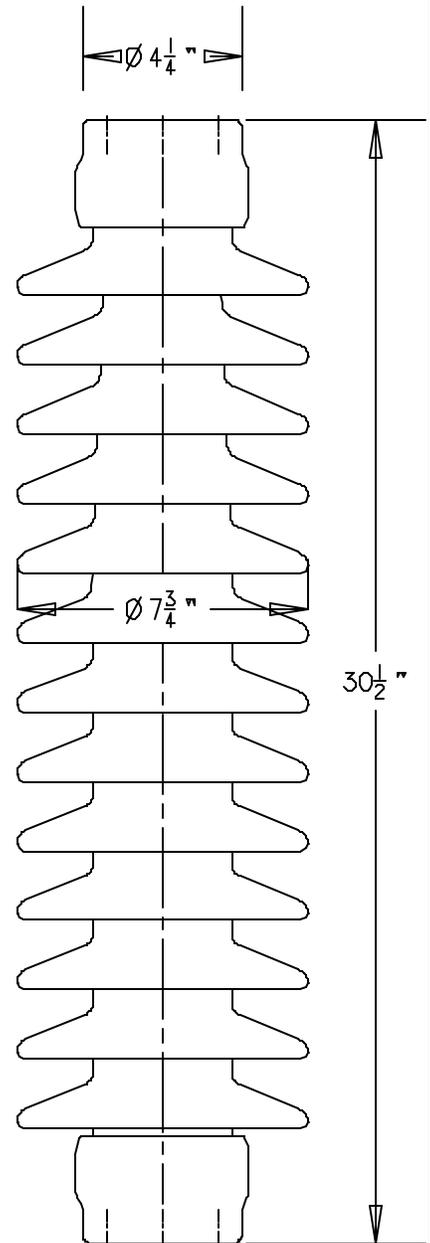

4 HOLES EACH END
 $\frac{1}{2}$ -13 +.015" ON Ø3" B.C.

THIS DRAWING IS THE PROPERTY OF
 VICTOR INSULATORS, INC. AND CONTAINS
 PROPRIETARY AND CONFIDENTIAL INFORMATION
 WHICH MUST NOT BE DUPLICATED, USED,
 OR DISCLOSED OTHER THAN AS EXPRESSLY
 AUTHORIZED BY VICTOR INSULATORS, INC.

07-26-05

TM



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (585)924-2127

1745