

30

CAP AND PIN REPLACEMENT

CAT. NO. 1746

34.5kV 200KV BIL

REPLACES CAP & PIN TR 10

1 ENG. MGR
2 ENG
PURCH.
1 MKTG.
PLT. MGR.
COST
PROD.
INSP
GLAZE
BUSHING
MAKING
SHIP
ASSEM
MODEL
MACH.
45
TOOLING
CER LAB
EL LAB
Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 33(838mm)

MECHANICAL VALUES

CANTILEVER STRENGTH, UPRIGHT	LB	2,000	{	8.9kN
CANTILEVER STRENGTH, UNDERHUNG	LB	2,000	{	8.9kN
TENSION STRENGTH	LB	7,000	{	31.1kN
TORSION STRENGTH	IN-LB	10,000	{	1.1kNm
COMPRESSION STRENGTH	LB	15,000	{	66.7kN

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS.	kV	225	4 HOLES EACH END
IMPULSE WITHSTAND	kV	200	1/2-13 +.015" ON 3" B.C.
60 HERTZ WITHSTAND-WET	kV	80	(76.2mm)

RADIO INFLUENCE VOLTAGE DATA

RIV TEST VOLTAGE TO GROUND	kV	22
MAXIMUM RIV AT 1000 KHZ	µV	100

PACKING INFORMATION

NET WEIGHT, EACH	LB	34
PACKED WEIGHT, EACH	LB	36
NO. IN STD. PACKAGE		2

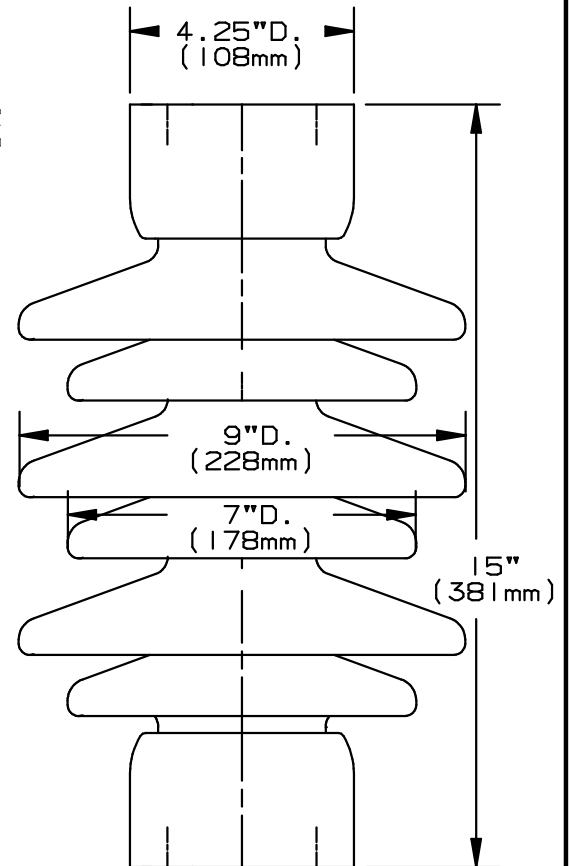

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

	Victor Insulators, Inc. 280 MAPLE AVENUE VICTOR, NEW YORK 14564 TELEPHONE: (716)924-2127	1746