

STATION POST

CAT. NO. 17PA22

161 kV 750 kV BIL
TR 291

DIMENSIONS:

LEAKAGE DISTANCE IN 132

MECHANICAL VALUES:

CANTILEVER STRENGTH LB 1,200
TENSION STRENGTH LB 20,000
TORSION STRENGTH IN-LB 40,000
COMPRESSION STRENGTH LB 60,000

ELECTRICAL VALUES:

IMPULSE FLASHOVER-POSITIVE kV 810
60 HERTZ WITHSTAND-WET kV 315
IMPULSE WITHSTAND kV 750


RADIO INFLUENCE VOLTAGE DATA:

60 HERTZ TEST VOLTAGE TO GROUND kV 103
MAXIMUM R.I.V. @ 1000 kHz μV 200

PACKAGING INFORMATION:

NET WEIGHT, LB 230
PACKED WEIGHT LB 250
NO. IN STANDARD PACKAGE 1

4 HOLES 5/8"-11 +.015
ON 5" B.C., BOTH ENDS

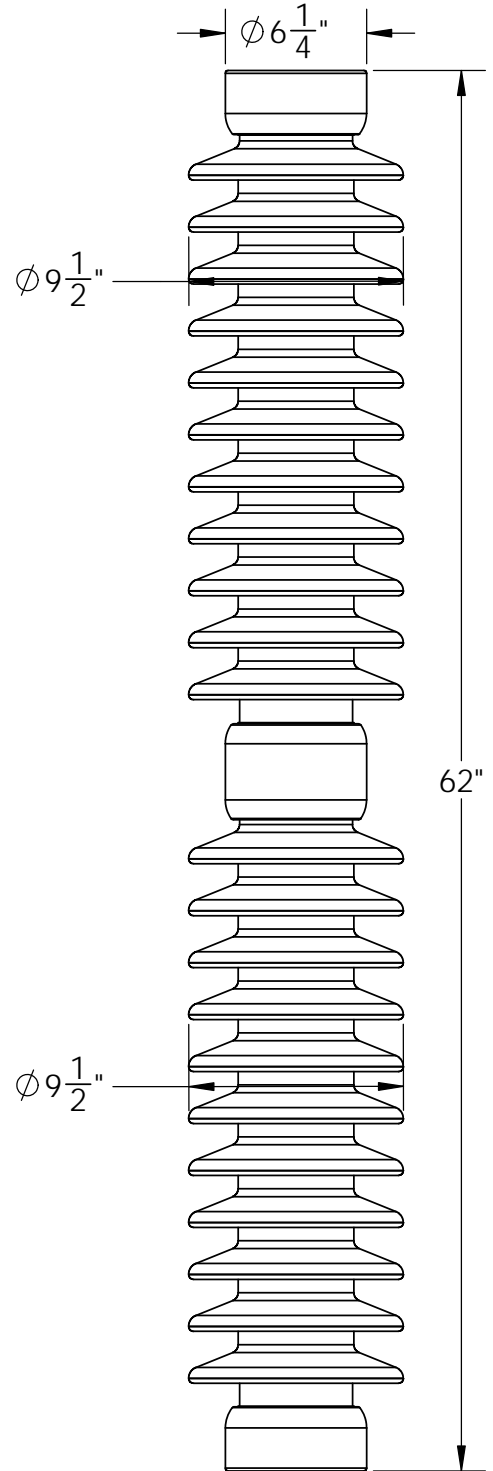

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwalm at 3:10 pm, Oct 03, 2016



Victor Insulators, Inc.
280 Maple Avenue
Victor, New York 14564
Telephone: (585)924-2127
www.victorinsulators.com

17PA22

09-28-16

TM

SUPERSEDES DWG 17PA22 DATED 06-22-95