

19

FOG BOWL INSULATOR
CAT. NO. 39R
F-NECK 1" PINHOLE

END. NBR
END
PURCH.
MKTG.
PLT. NBR.
COST
PROD.
INSP
GLAZE
BURNING
MAKING
SHIP
ASSEM
MODEL
MACH.
48
TOOLING
CER LAB
EL. LAB
G. A.

DIMENSIONS

LEAKAGE DISTANCE	IN	18.5
DRY ARCING DISTANCE	IN	7.25
MINIMUM PIN HEIGHT	IN	7

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	3,000
---------------------	----	-------

ELECTRICAL VALUES


60 HERTZ FLASHOVER - DRY	kV	100
60 HERTZ FLASHOVER - WET	kV	50
IMPULSE FLASHOVER - POS.	kV	160
IMPULSE FLASHOVER - NEG.	kV	140
60 HERTZ PUNCTURE VOLTAGE	kV	140

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE RMS TO GRD.	kV	15
MAXIMUM RIV @ 1000 kHz	μ V	100

PACKING INFORMATION

NET WEIGHT, PER 100	LB	720
PACKED WEIGHT, PER 100	LB	800
NO. IN STANDARD PACKAGE		4

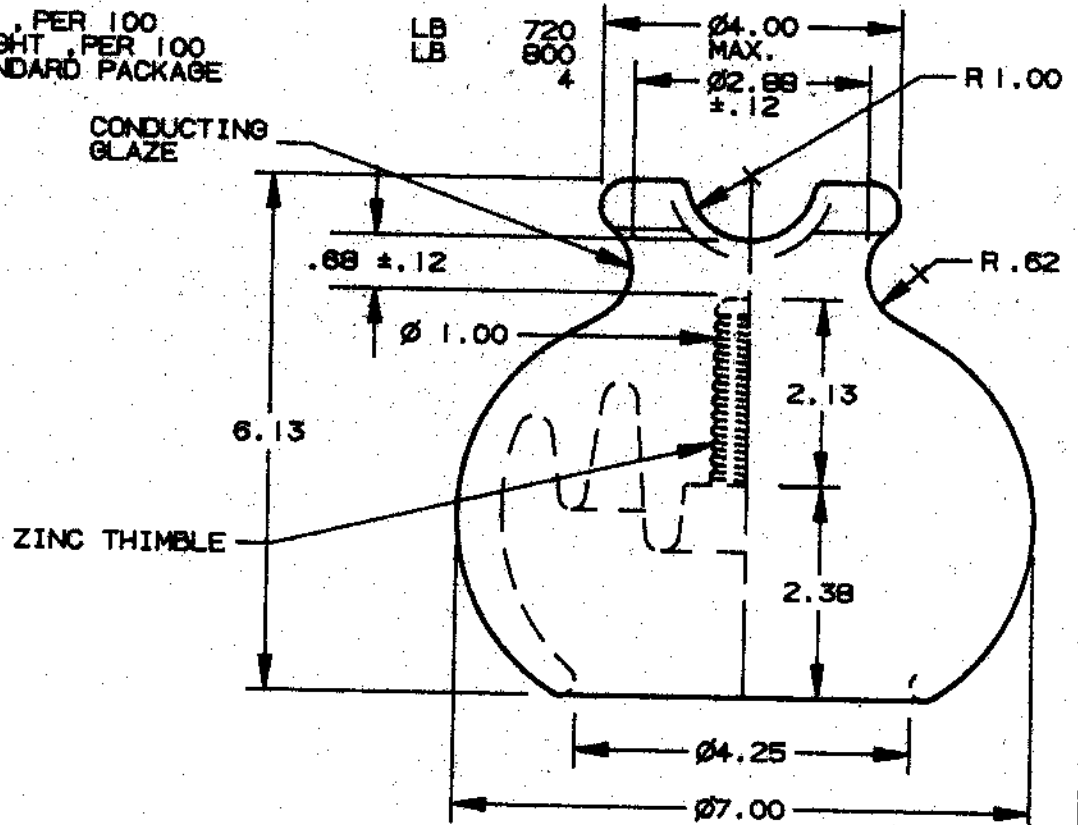

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE REPRODUCED, COPIED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE 39R

4-25-95

TP



Victor Insulators, Inc.
280 MAPLE AVENUE
MAIL P.O. BOX B, VICTOR, NEW YORK 14594
TELEPHONE: (716) 924-2127

39 R

SUPERSEDES DRAWING DATED 7-22-88