

30

CLAMP TOP LINE POST	
VERTICAL MOUNTING	
88kV	CAT. NO. 62159
ANSI CLASS 57-16	

1 ENG. MGR.
 2 ENG.
 PURCH.
 MKTG.
 COST
 PROD.
 INSP.
 GLAZE
 BUSHING
 MAKING
 SHIP.
 ASSEM.
 MODEL
 MACH.
 45
 TOOLING
 CER. LAB.
 EL. LAB.
 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE	IN	53
DRY ARCING DISTANCE	IN	19 1/4

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	2,800
---------------------	----	-------

ELECTRICAL VALUES


60 HERTZ FLASHOVER-DRY	kV	180
60 HERTZ FLASHOVER-WET	kV	150
IMPULSE FLASHOVER-POS.	kV	300

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE RMS TO GRD.	kV	44
MAXIMUM RIV @ 1000 kHz	μV	200

PACKING INFORMATION

NET WEIGHT PER 100	LB	6,750
PACKED WEIGHT PER 100	LB	7,150
NO. IN STANDARD PACKAGE		1

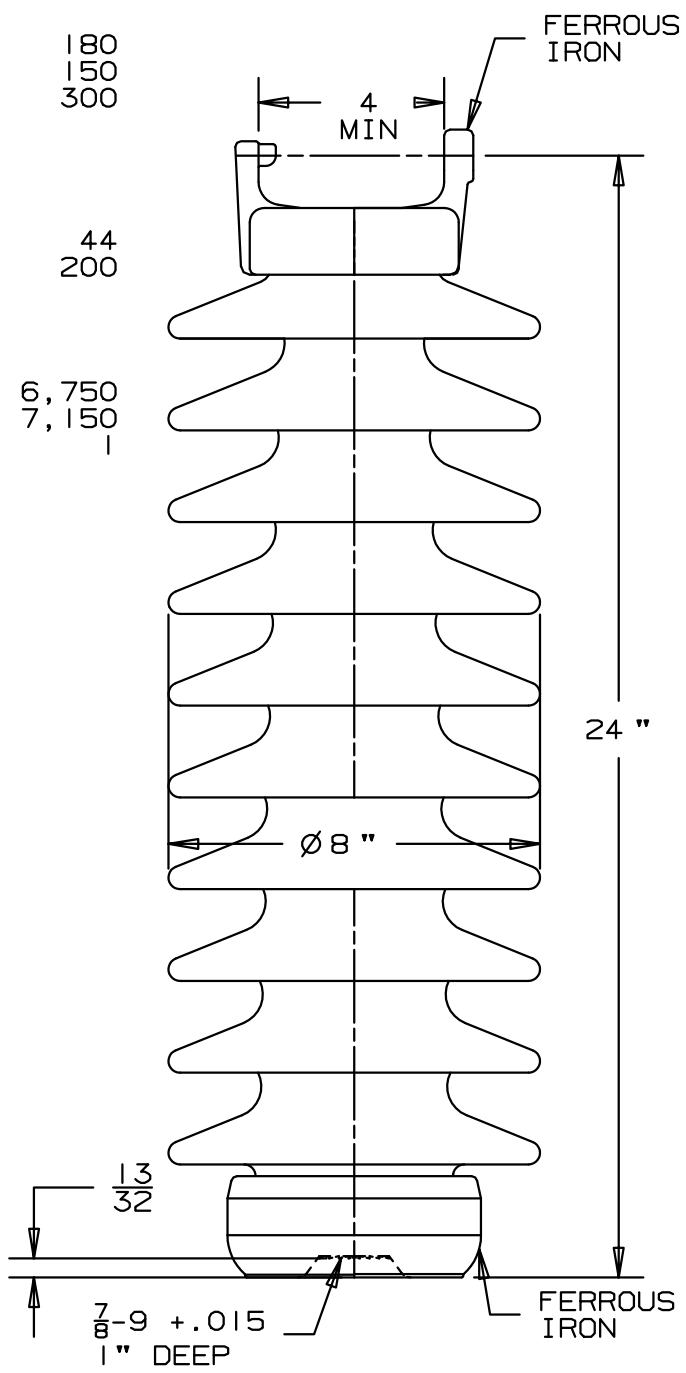

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
 By Andrew E. Schwalm at 10:59 am, Nov 03, 2011

11-03-11	ADDED DIMS	TM		
05-19-08	REV'D PORC	TM		
5-20-98		DF	PP	RG



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (716)924-2127

62159