

30

STATION POST	
CAT. NO. 1722	
161 kV	750 kV BIL
TR. NO. 291	
SOLID CORE PORCELAIN	

- 1 ENG. MGR.
- 2 ENG.
- PURCH.
- MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP.
- GLAZE
- BUSHING
- MAKING
- SHIP.
- ASSEM.
- MODEL
- MACH.
- 45
- TOOLING
- CER. LAB.
- EL. LAB.
- D. A.

DIMENSIONS

LEAKAGE DISTANCE IN 132

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	1,200
TENSILE STRENGTH	LB	20,000
TORSION STRENGTH	IN-LB	40,000
COMPRESSION STRENGTH	LB	60,000

ELECTRICAL VALUES

60 HERTZ WITHSTAND-WET	kV	315
IMPULSE WITHSTAND	kV	750
IMPULSE FLASHOVER-POS.	kV	810


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GRD.	kV	103
MAXIMUM RIV @ 1000 kHz	uV	200

PACKING INFORMATION

NET WEIGHT, EACH	LB	172
PACKED WEIGHT, EACH	LB	192
NO. IN STANDARD PACKAGE		1

4 HOLES EACH END
5/8-11 +.015" ON 5" B.C.

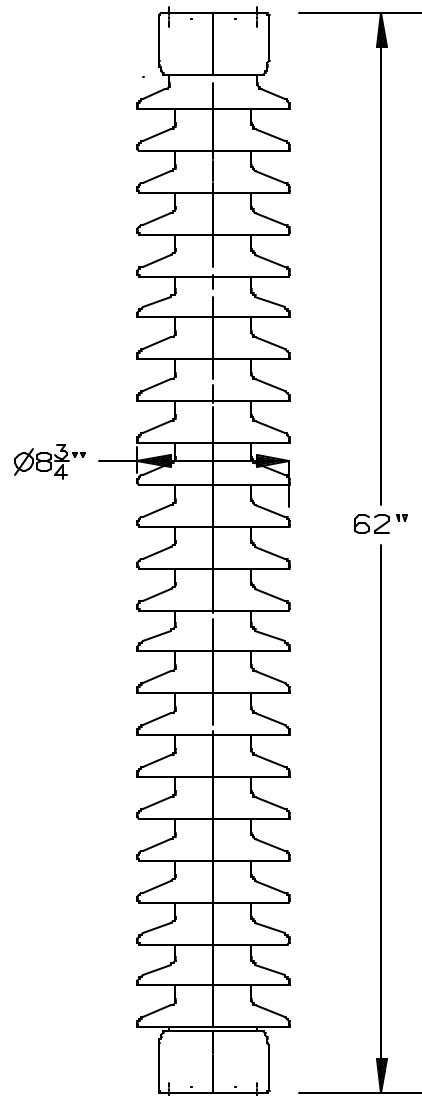

THIS DRAWING IS THE PROPERTY OF
 VICTOR INSULATORS, INC. AND CONTAINS
 PROPRIETARY AND CONFIDENTIAL INFORMATION
 WHICH MUST NOT BE DUPLICATED, USED,
 OR DISCLOSED OTHER THAN AS EXPRESSLY
 AUTHORIZED BY VICTOR INSULATORS, INC.

11-6-01		PP	AS
12-18-00	TM	PP	RG



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (716)924-2127

1722