

30

STATION POST	
CAT. NO. 1725	
115 kV	550 kV BIL
TR NO. 287	
SOLID CORE PORCELAIN	

ENG. MGR.
 2 ENG.
 PURCH.
 MKTG.
 PLT. MGR.
 COST
 PROD.
 INSP.
 GLAZE
 BUSHING
 MAKING
 SHIP.
 ASSEM.
 MODEL
 MACH.
 45
 TOOLING
 CER. LAB.
 EL. LAB.
 O.A.

DIMENSIONS

LEAKAGE DISTANCE IN 116

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	2,600
TENSILE STRENGTH	LB	25,000
TORSION STRENGTH	IN-LB	90,000
COMPRESSION STRENGTH	LB	75,000

4 HOLES EACH END
 5/8-11 + .015 ON 5" B.C.

ELECTRICAL VALUES


60 HERTZ WITHSTAND-WET	kV	230
IMPULSE FLASHOVER-POS.	kV	610
IMPULSE WITHSTAND	kV	550

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE TO GRD.	kV	73
MAXIMUM RIV @ 1000 kHz	uV	200

PACKING INFORMATION

NET WEIGHT, EACH	LB	142
PACKED WEIGHT, EACH	LB	162
NO. IN STANDARD PACKAGE		1

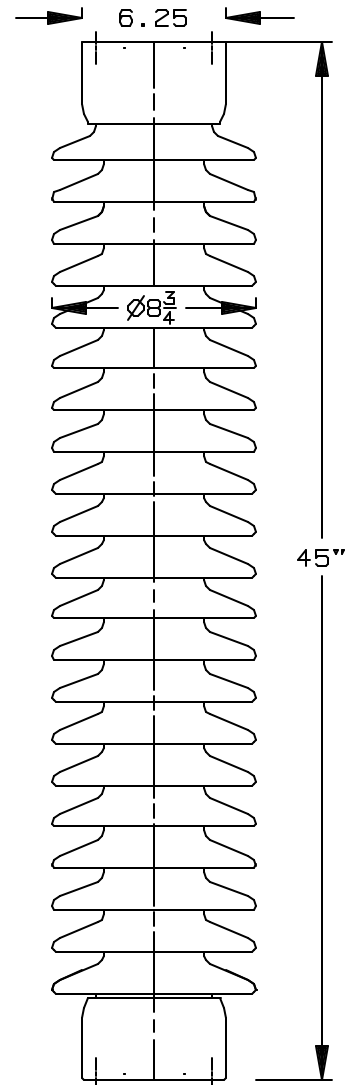

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

01-05-06	TM		B
08-09-05	TM	AS	A
11-19-03	TM	AS	



Victor Insulators, Inc.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (585) 924-2127

1725