

30

STATION POST

CAT. NO. 1727

161 kV 750 kV BIL

TR. NO. 295

SOLID CORE PORCELAIN

- | ENG. MGR.
- 2 ENG.
- PURCH.
- MKTG.
- FLT. MGR.
- | COST
- PROD.
- | INSP.
- GLAZE
- BUSHING
- MAKING
- | SHIP.
- | ASSEM.
- MODEL
- MACH.
- 45
- TOOLING
- CER. LAB.
- | E. MEDIA
- Q. A.

DIMENSIONS

LEAKAGE DISTANCE IN 132

MECHANICAL VALUES

CANTILEVER STRENGTH LB 1,850  
 TENSION STRENGTH LB 25,000  
 TORSION STRENGTH IN-LB 90,000  
 COMPRESSION STRENGTH LB 75,000

ELECTRICAL VALUES

IMPULSE FLASHOVER-POS. kV 810  
 60 HERTZ WITHSTAND-WET kV 315  
 IMPULSE WITHSTAND kV 750


RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE kV 103  
 MAXIMUM RIV @ 1000 KHZ uV 200

PACKING INFORMATION

NET WEIGHT, EACH LB 208  
 PACKED WEIGHT, EACH LB 228  
 NO. IN STANDARD PACKAGE 1

4 HOLES EACH END  
 5/8-11 +.015" ON 5" B.C.

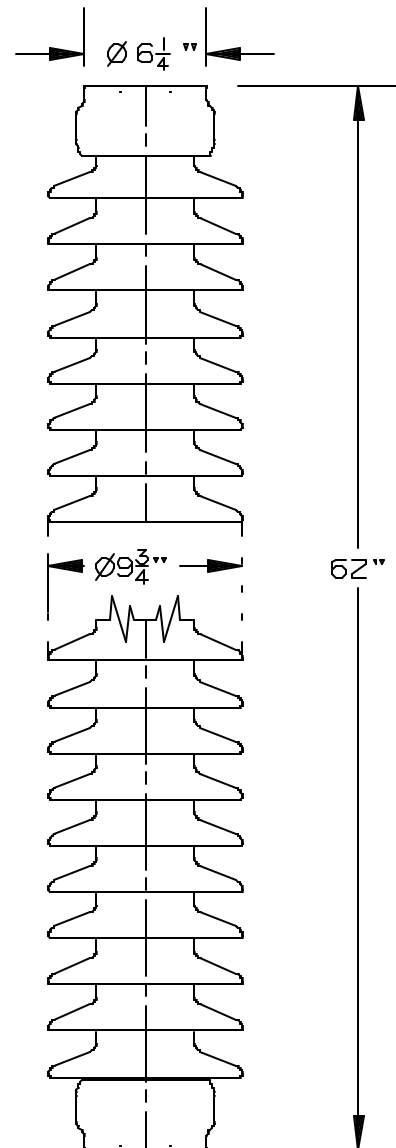

THIS DRAWING IS THE PROPERTY OF  
 VICTOR INSULATORS, INC. AND CONTAINS  
 PROPRIETARY AND CONFIDENTIAL INFORMATION  
 WHICH MUST NOT BE DUPLICATED, USED,  
 OR DISCLOSED OTHER THAN AS EXPRESSLY  
 AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: 1727



Victor Insulators, Inc.

280 MAPLE AVENUE  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (585)924-2127

1727

12-19-00

TM AS