

STATION POST


CAT. NO. 17PA29

230 kV

1,050 kV BIL

TR 316

4 HOLES 5/8"-11 +.015
ON 5" B.C., BOTH ENDS




Ø 10"

Ø 10"

Ø 10"

92"

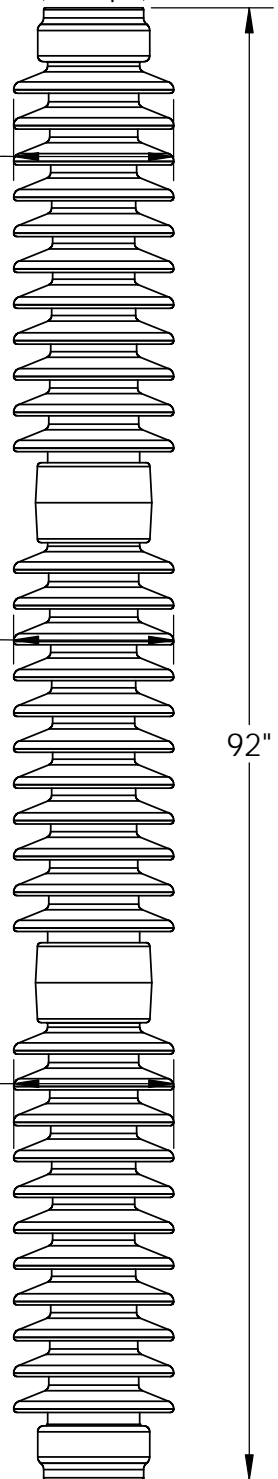

DIMENSIONS:

LEAKAGE DISTANCE IN 198

MECHANICAL VALUES:

CANTILEVER STRENGTH LB 1,250
TENSION STRENGTH LB 25,000
TORSION STRENGTH IN-LB 90,000
COMPRESSION STRENGTH LB 75,000

ELECTRICAL VALUES:

IMPULSE FLASHOVER-POSITIVE kV 1,210
60 HERTZ WITHSTAND-WET kV 455
IMPULSE WITHSTAND kV 1,050

RADIO INFLUENCE VOLTAGE DATA:

60 HERTZ TEST VOLTAGE TO GROUND kV 146
MAXIMUM R.I.V. @ 1000 kHz μ V 500

PACKAGING INFORMATION:

NET WEIGHT, LB 325
PACKED WEIGHT LB 370
NO. IN STANDARD PACKAGE 1

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwalm at 2:09 pm, Oct 03, 2016

09-28-16

TM



Victor Insulators, Inc.

280 Maple Avenue
Victor, New York 14564
Telephone: (585)924-2127
www.victorinsulators.com

17PA29