

STATION POST

CAT. NO. PSP-278P

69 kV 350 kV BIL

ANSI PSP-278P

DIMENSIONS:

LEAKAGE DISTANCE IN 72

MECHANICAL VALUES:


CANTILEVER STRENGTH LB 2,000
 TENSION STRENGTH LB 17,500
 TORSION STRENGTH IN-LB 6,000
 COMPRESSION STRENGTH LB 17,500

ELECTRICAL VALUES:

IMPULSE FLASHOVER-POSITIVE kV 370
 60 HERTZ WITHSTAND-WET kV 145
 IMPULSE WITHSTAND kV 350

RADIO INFLUENCE VOLTAGE DATA:

60 HERTZ TEST VOLTAGE TO GROUND kV 44
 MAXIMUM R.I.V. @ 1000 kHz μ V 200

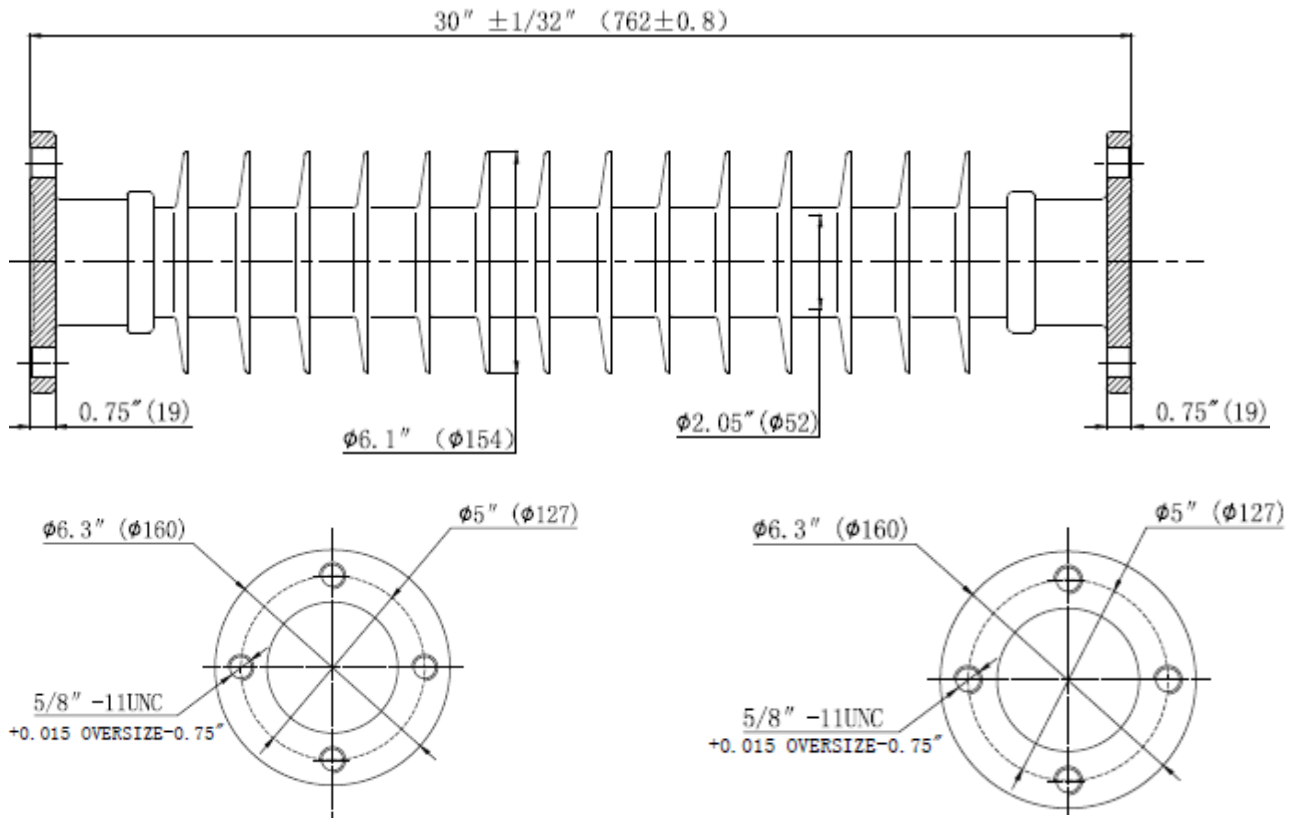

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
 By A. E. Schwalm at 1:26 pm, Jun 29, 2018

06-26-18		TM	
04-05-16		TM	
01-02-14		TM	



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

PSP-278P