


COMPOSITE INSULATOR

CAT. NO. PSP-291P

DIMENSIONS IN MILLIMETERS

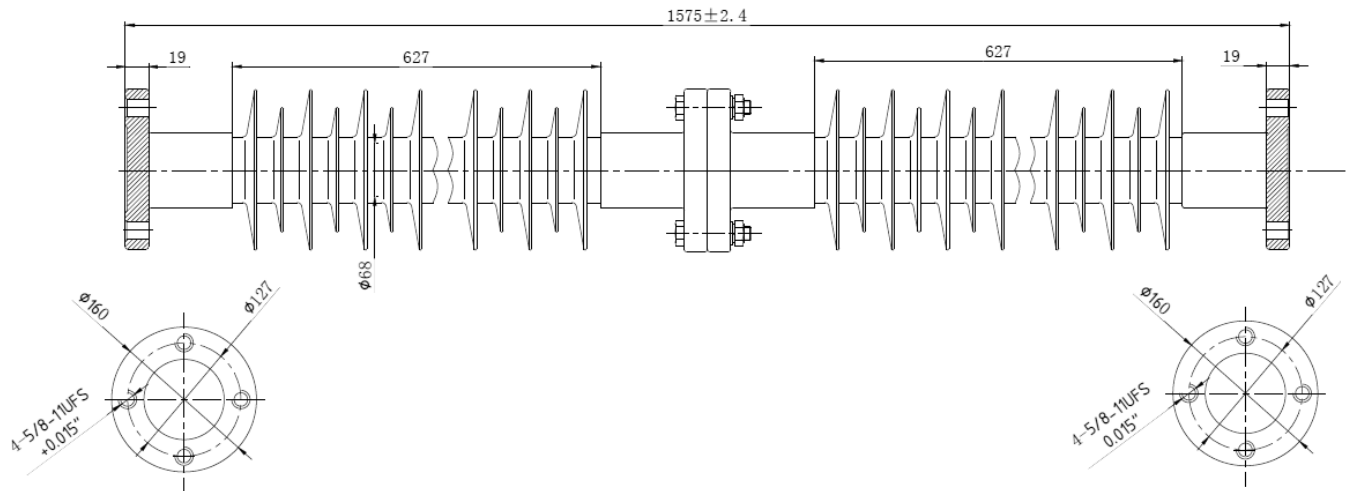

TECHNICAL SPECIFICATIONS:

DIMENSIONS:

LEAKAGE DISTANCE mm 3,810

MECHANICAL VALUES:

SPECIFIED CANTILEVER LOAD(SCL) kN 8.9
 COMPRESSION STRENGTH kN 30
 TENSION STRENGTH kN 30
 TORSION STRENGTH kN-m 1.6

ELECTRICAL VALUES:

IMPULSE FLASHOVER, POS kV 810
 60 HERTZ WITHSTAND, WET kV 315
 IMPULSE WITHSTAND kV 750

RADIO INFLUENCE VOLTAGE DATA:

60 HERTZ TEST VOLTAGE TO GROUND kV 500
 MAXIMUM R.I.V. @ 1,000 kHz μV 103

APPROVED

By A. E. Schwalm at 2:21 pm, May 16, 2019



Victor Insulators, Inc.

280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

PSP-291P

05-16-19

TM

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.