

STATION POST

CAT. NO. PSP-308P

230 kV 900 kV BIL

ANSI PSP-308P

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRDD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

DIMENSIONS:

LEAKAGE DISTANCE IN(MM) 230(5842)

MECHANICAL VALUES:


CANTILEVER STRENGTH LB(kN) 1,450(6.4)
 TENSION STRENGTH LB(kN) 17,500(77.8)
 TORSION STRENGTH IN-LB(kN-M) 18,000(2)
 COMPRESSION STRENGTH LB(kN) 17,500(77.8)

ELECTRICAL VALUES:

IMPULSE FLASHOVER-POSITIVE kV 1,010
 60 HERTZ WITHSTAND-WET kV 385
 IMPULSE WITHSTAND kV 900

RADIO INFLUENCE VOLTAGE DATA:

60 HERTZ TEST VOLTAGE TO GROUND kV 146
 MAXIMUM R.I.V. @ 1000 kHz μV 500

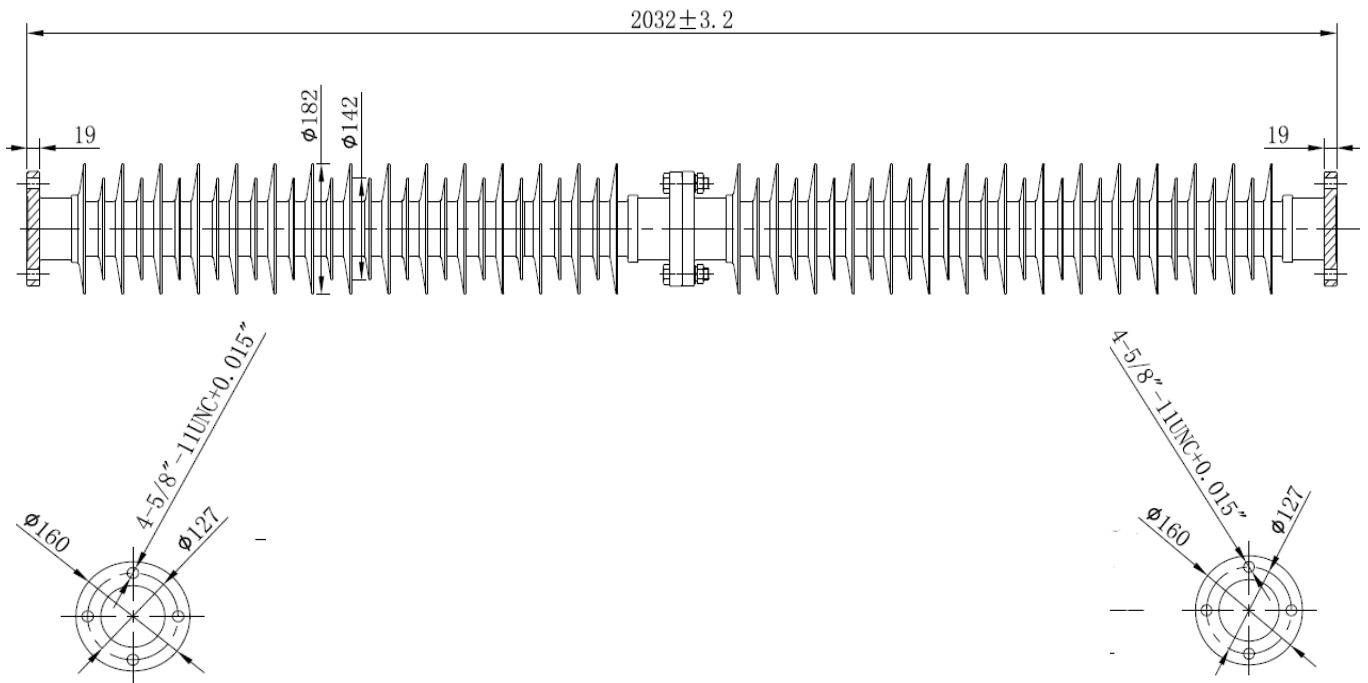

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
 By A. E. Schwalm at 11:20 am, Jan 31, 2019

01-31-19		TM	
09-14-16		TM	



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

PSP-308P