

19

LOW VOLTAGE PIN TYPE

CAT. NO. VI 606R

F-NECK 1" PINHOLE

ANSI CLASS 55-4

DIMENSIONS

ENG. MGR.	LEAKAGE DISTANCE	IN	9
2 ENG.	DRY ARCING DISTANCE	IN	5
PURCH.	MINIMUM PIN HEIGHT	IN	5

MECHANICAL VALUES

PLT. MGR.	CANTILEVER STRENGTH	LB	3,000
-----------	---------------------	----	-------

ELECTRICAL VALUES

GLAZE	IMPULSE FLASHOVER-POS.	kV	105
BUSHING	IMPULSE FLASHOVER-NEG.	kV	130
MAKING	60 HERTZ FLASHOVER-WET	kV	35
SHIP.	60 HERTZ FLASHOVER-DRY	kV	65
ASSEM.	60 HERTZ PUNCTURE VOLTAGE	kV	95


RADIO INFLUENCE VOLTAGE DATA

MODEL	60 HERTZ TEST VOLTAGE	kV	10
MACH.	MAXIMUM RIV @ 1000 KHz	μV	50

PACKING INFORMATION

CER. LAB.	NET WEIGHT PER 100	LB	361
EL. LAB.	PACKED WEIGHT PER 100	LB	383
E. MEDIA	NO. IN STANDARD PACKAGE		12

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

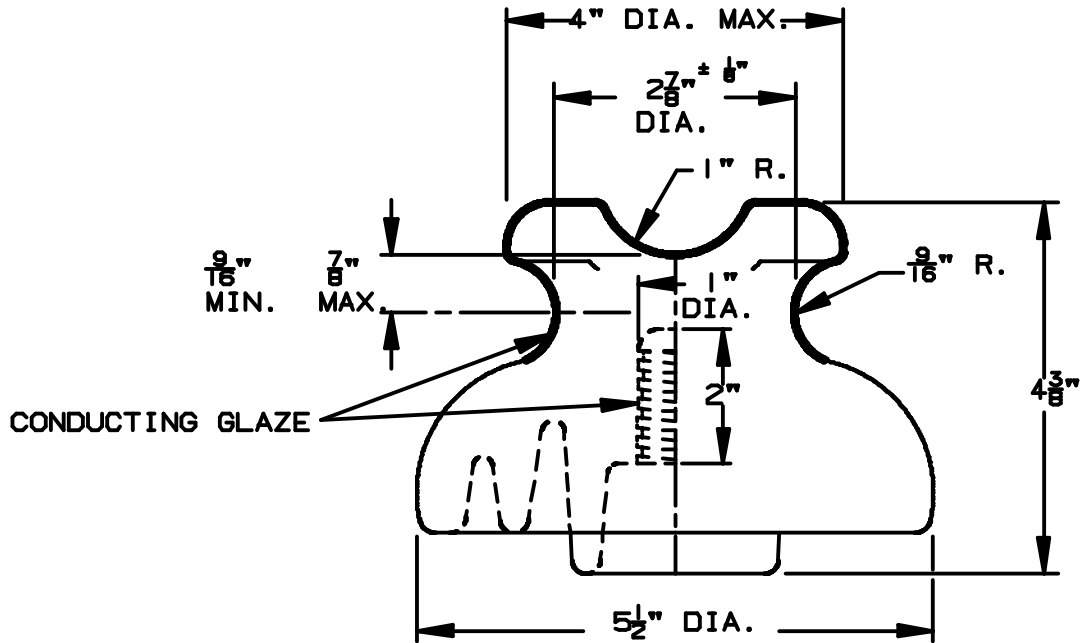

FILE: VI 606R

**VI** INSULATORS  
 VICTOR INSULATORS, INC.  
 280 MAPLE AVENUE  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (716)924-2127

VI 606R