

19

PINTYPE
CAT. NO. VI 608R
C-NECK 1" PINHOLE
ANSI CLASS 55-2

- 1 ENG. MGR
- 2 ENG PURCH.
- 1 MKTG.
- PLT. MGR.
- COST
- PROD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

DIMENSIONS

LEAKAGE DISTANCE IN 5

MECHANICAL VALUES

CANTILEVER STRENGTH LB 2,500

ELECTRICAL VALUES


60 HERTZ FLASHOVER - DRY	kV	45
60 HERTZ FLASHOVER - WET	kV	25
IMPULSE FLASHOVER - POS.	kV	70
IMPULSE FLASHOVER - NEG.	kV	85
60 HERTZ PUNCTURE VOLTAGE	kV	70

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE RMS TO GRD.	kV	5
MAXIMUM RIV @ 1000 KHz		
FOR VI 608 (PLAIN)	μV	2,500
FOR VI 608R (RADIO FREED)	μV	50

PACKING INFORMATION

NET WEIGHT ,PER 100	LB	138
PACKED WEIGHT ,PER 100	LB	146
NO. IN STANDARD PACKAGE		50

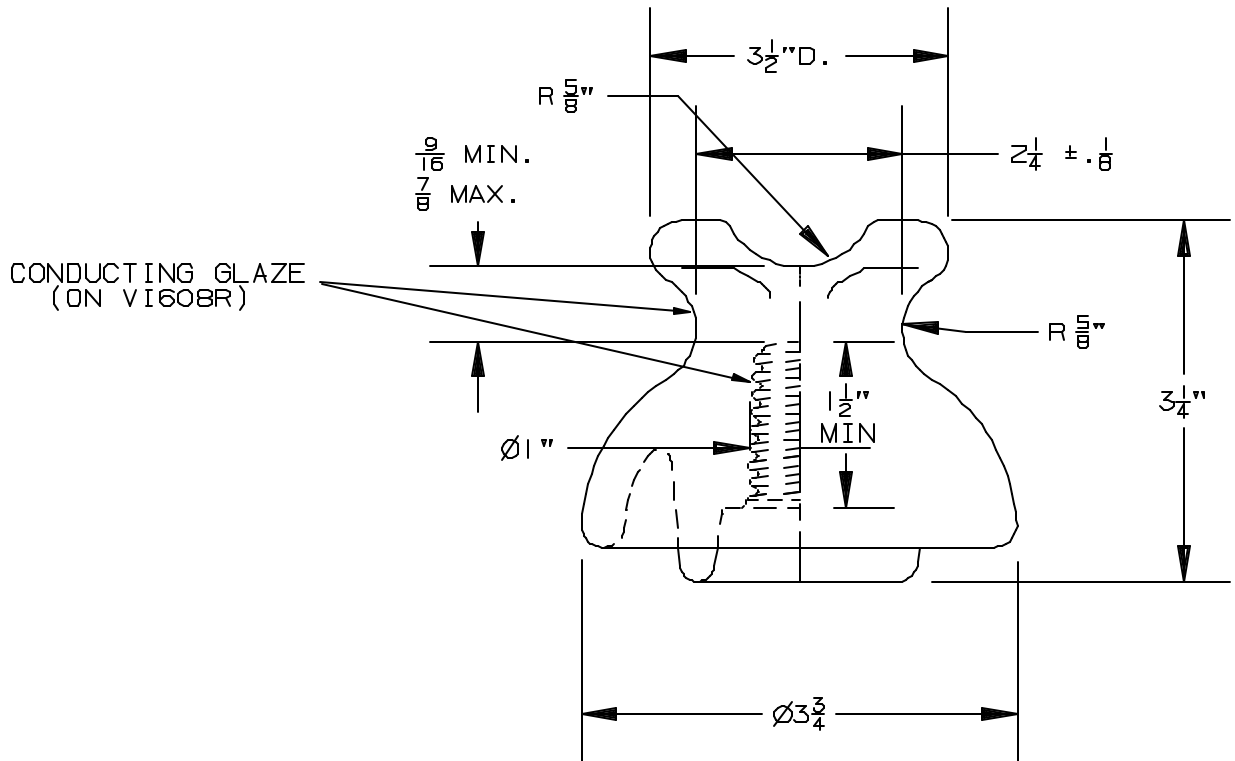

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED, OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

FILE: VI 608R

**V** INSULATORS  
 VICTOR INSULATORS, INC.  
 280 MAPLE AVENUE  
 VICTOR, NEW YORK 14564  
 TELEPHONE: (585) 924-2127

VI 608R