

19

PIN TYPE INSULATOR

CAT. NO. VI 611R

J-NECK 1" PINHOLE

ANSI CLASS 55-6

ENG. MGR.
 2 ENG.
 PURCH.
 MKTG.
 PLT. MGR.
 COST
 PROD.
 INSP.
 GLAZE
 BUSHING
 MAKING
 SHIP.
 ASSEM.
 MODEL
 MACH.
 45
 TOOLING
 CER. LAB.
 EL. LAB.
 E. MEDIA

DIMENSIONS

LEAKAGE DISTANCE	IN	15
DRY ARCING DISTANCE	IN	8

MECHANICAL VALUES

CANTILEVER STRENGTH	LB	3,000
---------------------	----	-------

ELECTRICAL VALUES


IMPULSE FLASHOVER-POS.	kV	150
IMPULSE FLASHOVER-NEG.	kV	170
60 HERTZ FLASHOVER-WET	kV	50
60 HERTZ FLASHOVER-DRY	kV	100
60 HERTZ PUNCTURE VOLTAGE	kV	135

RADIO INFLUENCE VOLTAGE DATA

60 HERTZ TEST VOLTAGE	kV	100
MAXIMUM RIV @ 1000 KHz	μ V	22

PACKING INFORMATION

NET WEIGHT PER 100	LB	930
PACKED WEIGHT PER 100	LB	980
NO. IN STANDARD PACKAGE		8

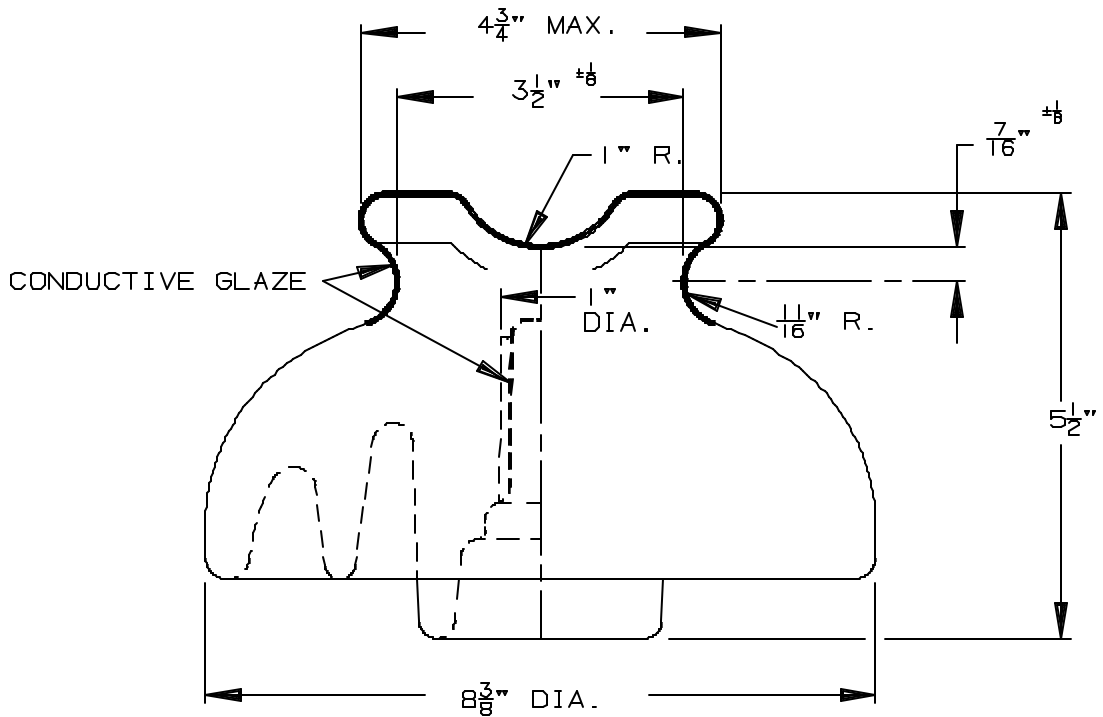

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

V INSULATORS
 VICTOR INSULATORS, INC.
 280 MAPLE AVENUE
 VICTOR, NEW YORK 14564
 TELEPHONE: (716)924-2127

VI 611R

5-21-02 TM RG

FILE: VI 611R