

COMPOSITE LINE POST

CAT. NO. HP-68SA-1218-3000-XX

DIMENSIONS

LEAKAGE DISTANCE mm 3,000

MECHANICAL VALUES

SPECIFIED CANTILEVER LOAD(SCL) kN 10

ELECTRICAL VALUES

SYSTEM VOLTAGE kV 115

IMPULSE WITHSTAND kV 550

IMPULSE FLASHOVER, POSITIVE kV 605

IMPULSE FLASHOVER, NEGATIVE kV 635


60 HERTZ FLASHOVER, DRY kV 385

60 HERTZ FLASHOVER, WET kV 320

PACKING INFORMATION

NET WEIGHT kg 25

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

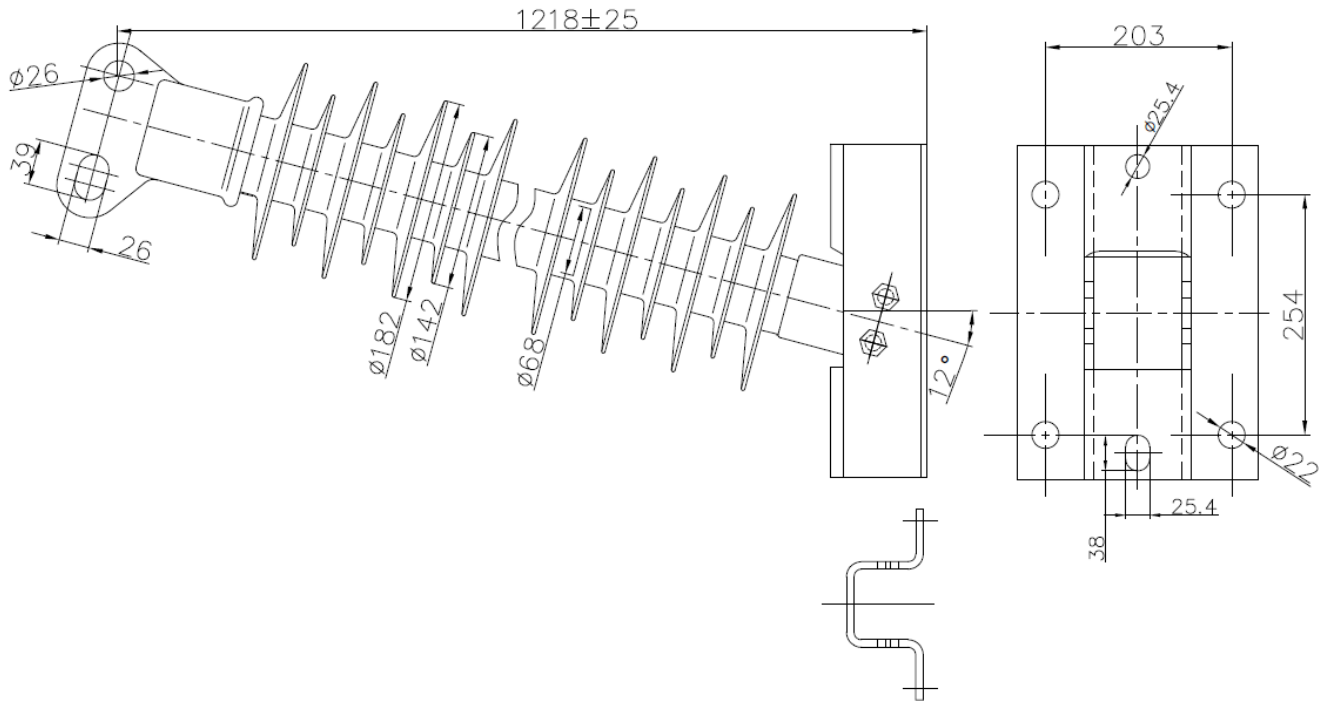

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwalm at 2:19 pm, Jun 21, 2022



Victor Insulators, Inc.
280 Maple Avenue
Victor, New York 14564
Telephone: (585)924-2127
www.victorinsulators.com

HP-68SA-1218-3000-XX

06-14-22

TM