COMPOSITE LINE POST

CAT. NO. HP-70DA-2982-8740-XX

1 ENG. MGR
2 ENG
PURCH.
1 MKTG.
PLT.MGR.
COST
PROD.
INSP
GLAZE
BUSHING
MAKING
SHIP
ASSEM
MODEL
MACH.
45
TOOLING
CER LAB
1 EL LAB
1 E.MEDIA

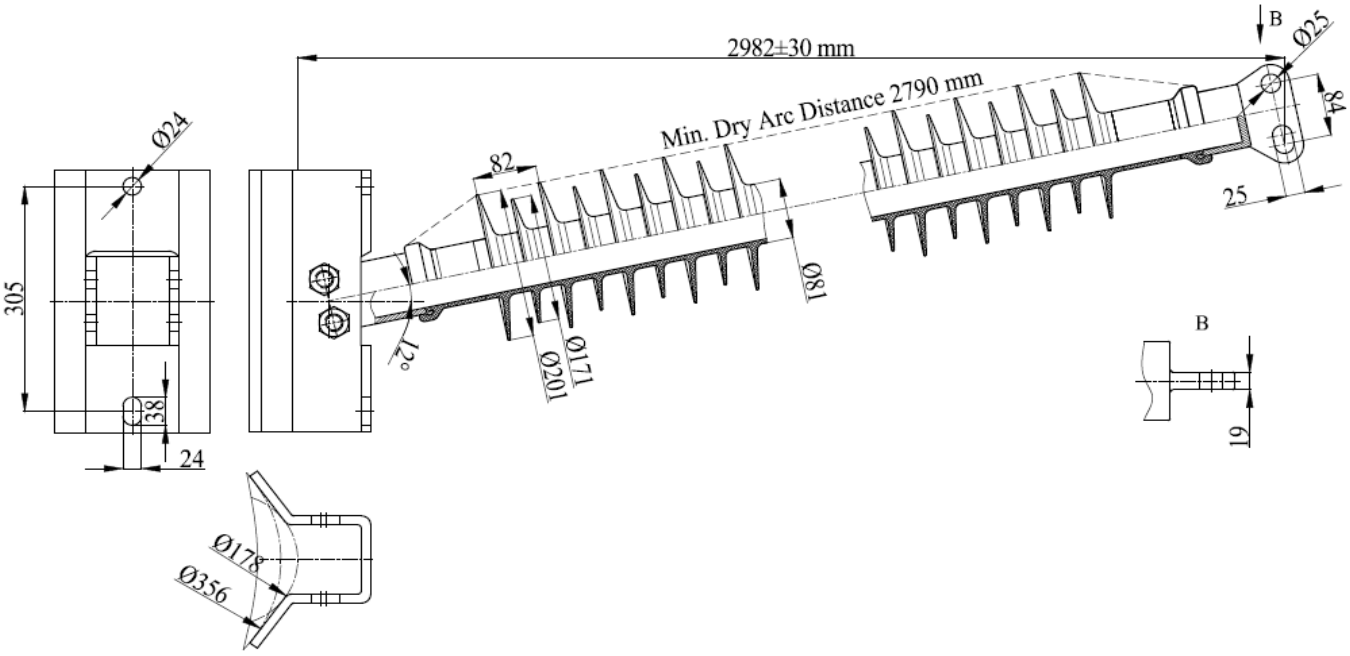

TECHNICAL SPECIFICATIONS:

RATED VOLTAGE	kV	345
60 HERTZ FLASHOVER, DRY	kV	1,060
60 HERTZ FLASHOVER, WET	kV	860
IMPULSE FLASHOVER, DRY	kV	1,685
IMPULSE FLASHOVER, WET	kV	1,770
LEAKAGE DISTANCE	mm	8,740
DRY ARCING DISTANCE	mm	2,790
SPECIFIED CANTILEVER LOAD(SCL)	kN	6.2
MAXIMUM DESIGN CANTILEVER LOAD(MDCL)	kN	3.1
WEIGHT	kg	61.8

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwalm at 7:42 am, Mar 08, 2021

Victor Insulators, Inc.
280 Maple Avenue
Victor, New York 14564
Telephone: (585)924-2127
www.victorinsulators.com

03-08-21		TM			HP-70DA-2982-8740-XX

FILE: HP-70DA-2982-8740-XX