

COMPOSITE LINE POST

CAT. NO. HP-70SA-2413-6820-XX

DIMENSIONS

LEAKAGE DISTANCE	mm	6,820
DRY ARCING DISTANCE	mm	2,210

MECHANICAL VALUES

SPECIFIED CANTILEVER LOAD(SCL)	kN	7
MAX DESIGN CANTILEVER LOAD(MDCL)	kN	3.5

ELECTRICAL VALUES

SYSTEM VOLTAGE	kV	230
IMPULSE FLASHOVER, POSITIVE	kV	1,330
IMPULSE FLASHOVER, NEGATIVE	kV	1,430
IMPULSE WITHSTAND	kV	1,050
LOW FREQUENCY FLASHOVER, DRY	kV	850
LOW FREQUENCY WITHSTAND, WET	kV	780


RADIO INFLUENCE VOLTAGE DATA:

R.I.V. TEST VOLTAGE	kV	146
MAXIMUM R.I.V. @ 1,000 KHZ	μV	500

PACKING INFORMATION

NET WEIGHT	kg	54.4
------------	----	------

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

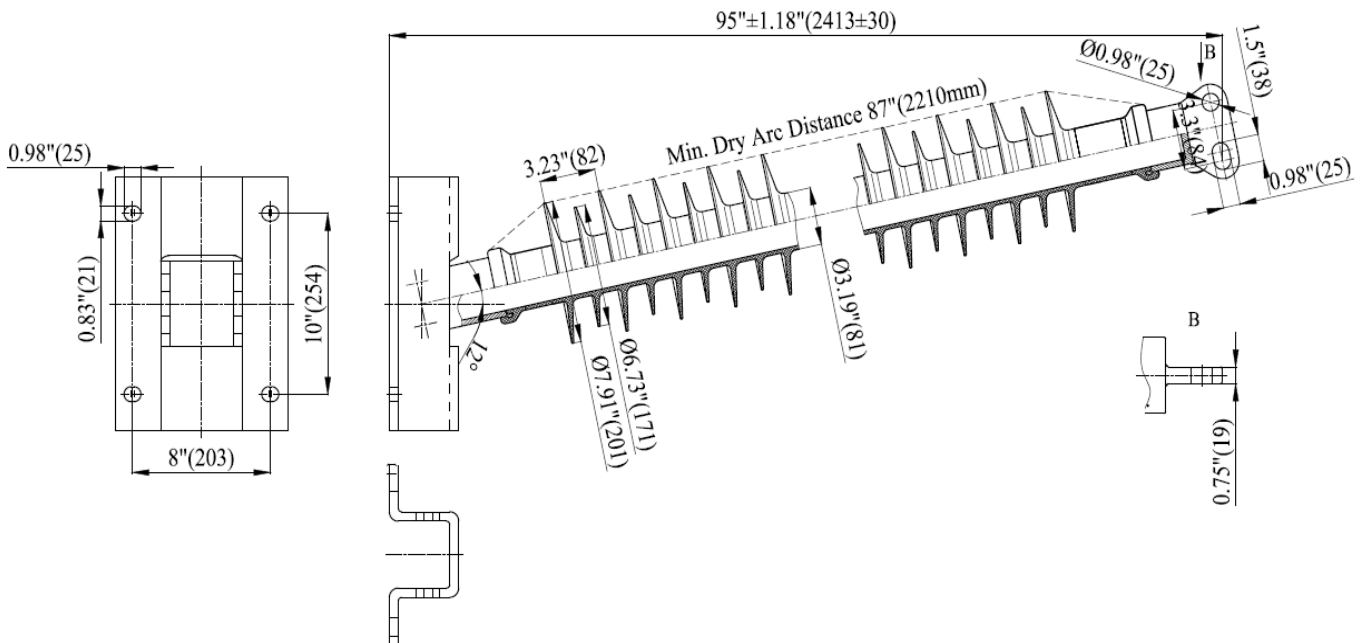

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwahn at 9:44 am, Mar 05, 2023

03-03-23	TM	
11-11-20	TM	



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

HP-70SA-2413-6820-XX