

33

COMPOSITE LINE POST

CAT. NO. HP-90DA-2458-6850-XX

DIMENSIONS

LEAKAGE DISTANCE	mm	6,850
DRY ARCING DISTANCE	mm	2,085

MECHANICAL VALUES

MAX DESIGN CANTILEVER LOAD (MDCL)	kN	6.5
SPECIFIED CANTILEVER LOAD(SCL)	kN	13


ELECTRICAL VALUES

SYSTEM VOLTAGE	kV	230
LOW FREQUENCY FLASHOVER, DRY	kV	860
LOW FREQUENCY FLASHOVER, WET	kV	790
60 HERTZ WITHSTAND, WET	kV	600
IMPULSE FLASHOVER, POSITIVE	kV	1,350
IMPULSE FLASHOVER, NEGATIVE	kV	1,445
IMPULSE WITHSTAND	kV	1,185

PACKING INFORMATION

NET WEIGHT	kg	82
------------	----	----

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

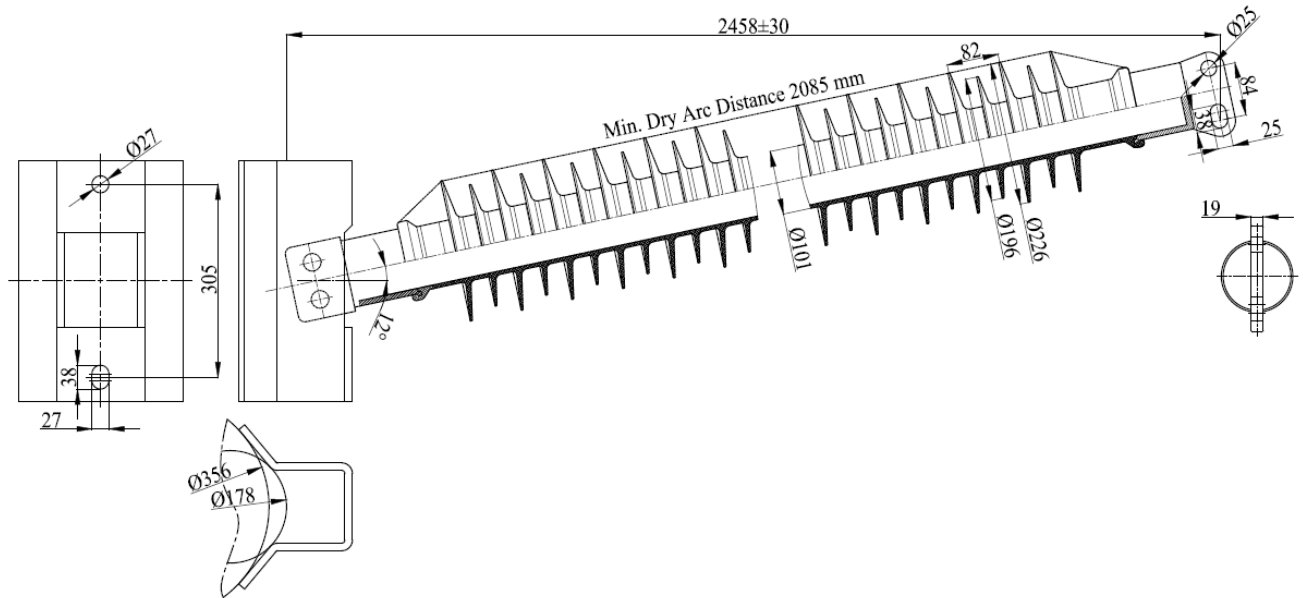

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwalm at 10:01 am, Mar 08, 2023

03-07-23	TM	
04-06-22	TM	



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

HP-90DA-
 2458-6850-
 XX