


COMPOSITE LINE POST

CAT. NO. HP-90FA-2690-7870-LX

APPROVED
By A. E. Schwalm at 11:10 am, Sep 30, 2020

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

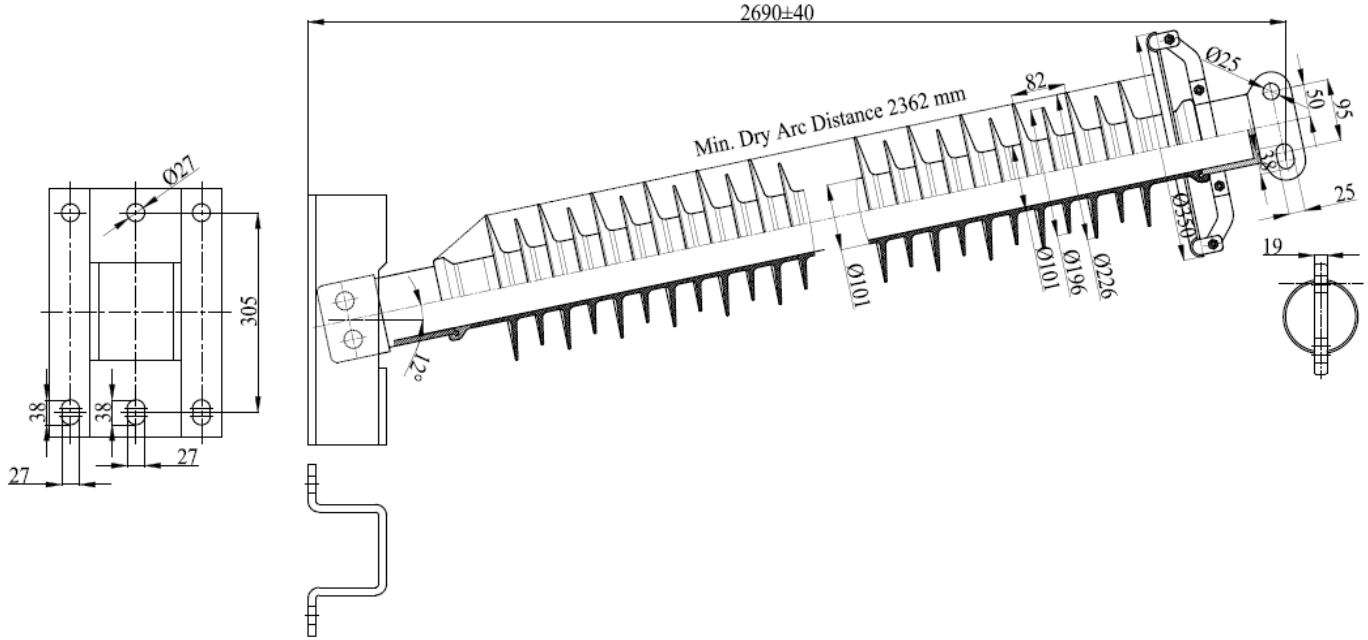

TECHNICAL SPECIFICATIONS:

RATED VOLTAGE	kV	345
IMPULSE FLASHOVER, POSITIVE	kV	1,050
IMPULSE FLASHOVER, NEGATIVE	kV	1,360
60 HERTZ FLASHOVER, DRY	kV	830
60 HERTZ FLASHOVER, WET	kV	790
LEAKAGE DISTANCE	mm	7,870
DRY ARCING DISTANCE	mm	2,362
SPECIFIED CANTILEVER LOAD(SCL)	kN	8.9
MAXIMUM DESIGN CANTILEVER LOAD(MDCL)	kN	4.5
WEIGHT	kg	82.9

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

09-22-20

TM



Victor Insulators, Inc.
280 Maple Avenue
Victor, New York 14564
Telephone: (585)924-2127
www.victorinsulators.com

HP-90FA-
2690-7870-LX