

COMPOSITE LINE POST

CAT. NO. HP-90FA-2895-8440-XX

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

DIMENSIONS

LEAKAGE DISTANCE	mm	8,440
DRY ARCING DISTANCE	mm	2,620

MECHANICAL VALUES

SPECIFIED CANTILEVER LOAD(SCL)	kN	8
MAXIMUM DESIGN CANTILEVER LOAD(MDCL)	kN	4


ELECTRICAL VALUES

SYSTEM VOLTAGE	kV	230
60 HERTZ FLASHOVER, DRY	kV	1,586
60 HERTZ FLASHOVER, WET	kV	1,599
IMPULSE FLASHOVER, POSITIVE	kV	901
IMPULSE FLASHOVER, NEGATIVE	kV	803

PACKING INFORMATION

NET WEIGHT	kg	14.8
------------	----	------

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

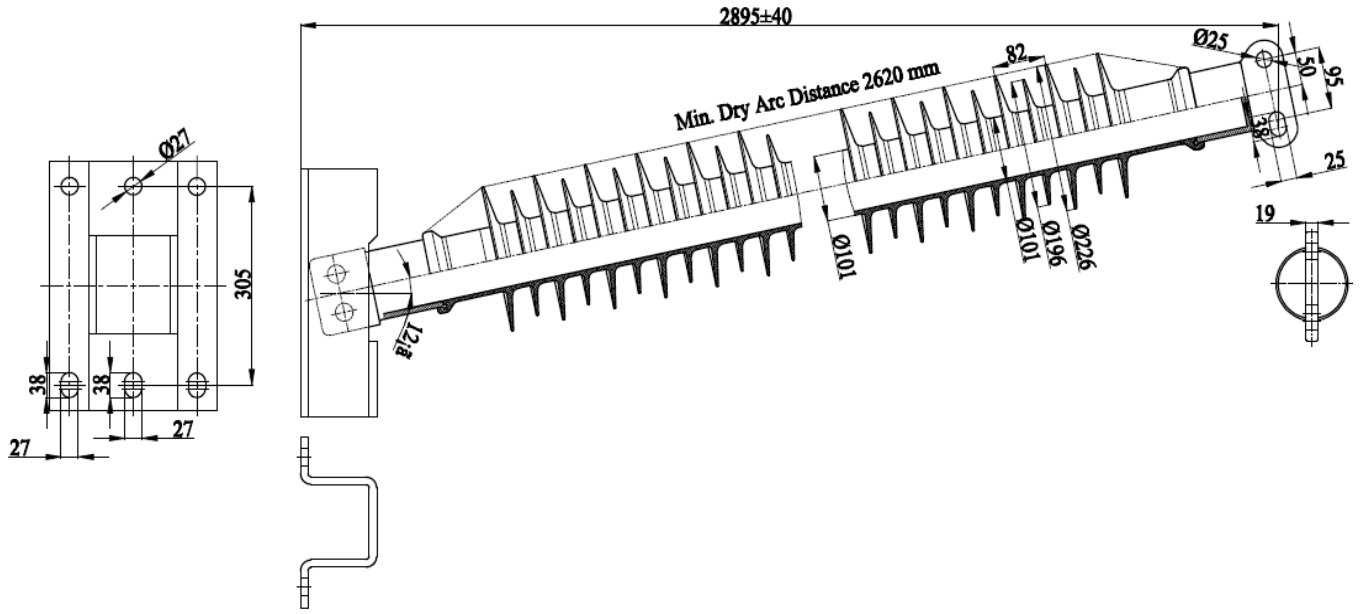

APPROVED
 By A. E. Schwalm at 2:40 am, Oct 18, 2022

10-17-22		TM	A
04-15-20		TM	

	Victor Insulators, Inc. 280 Maple Avenue Victor, New York 14564 Telephone: (585)924-2127 www.victorinsulators.com	HP-90FA- 2895-8440- XX
---	--	------------------------------