


COMPOSITE SUSPENSION

CAT. NO. T111-EE-2039-5290-AA

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

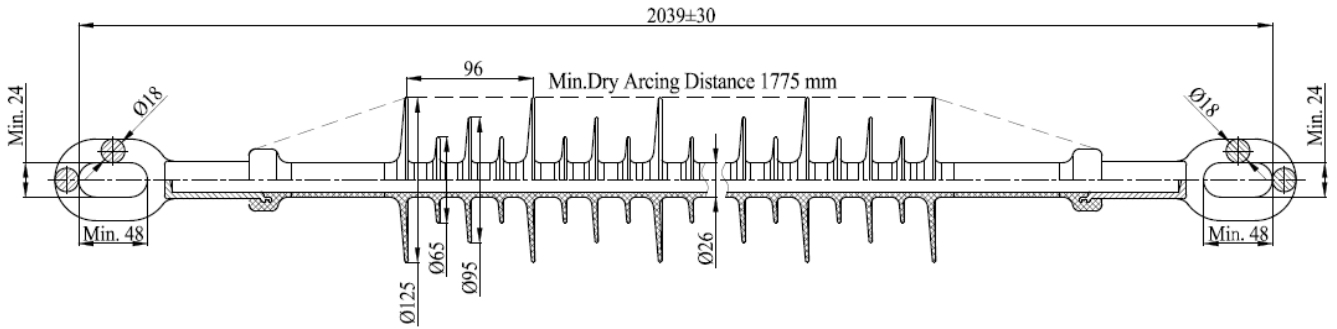

TECHNICAL SPECIFICATIONS:

SYSTEM VOLTAGE	kV	161
IMPULSE WITHSTAND, POSITIVE	kV	950
IMPULSE WITHSTAND, NEGATIVE	kV	970
60 HERTZ FLASHOVER, DRY	kV	635
60 HERTZ FLASHOVER, WET	kV	680
60 HERTZ WITHSTAND, WET	mm	420
LEAKAGE DISTANCE	mm	5290
DRY ARCING DISTANCE	kN	1775
SPECIFIED MECHANICAL LOAD (SML)	kN	111
ROUTINE TEST LOAD (RTL)		55.5
NET WEIGHT	kg	5.1

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

**APPROVED**  
By A. E. Schwalm at 2:57 pm, Jul 15, 2020



**Victor Insulators, Inc.**  
280 Maple Avenue  
Victor, New York 14564  
Telephone: (585)924-2127  
www.victorinsulators.com

T111-EE-  
2039-5290-  
AA

07-15-20

TM