


COMPOSITE SUSPENSION

CAT. NO. T111-EE-2340-6470-LA

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

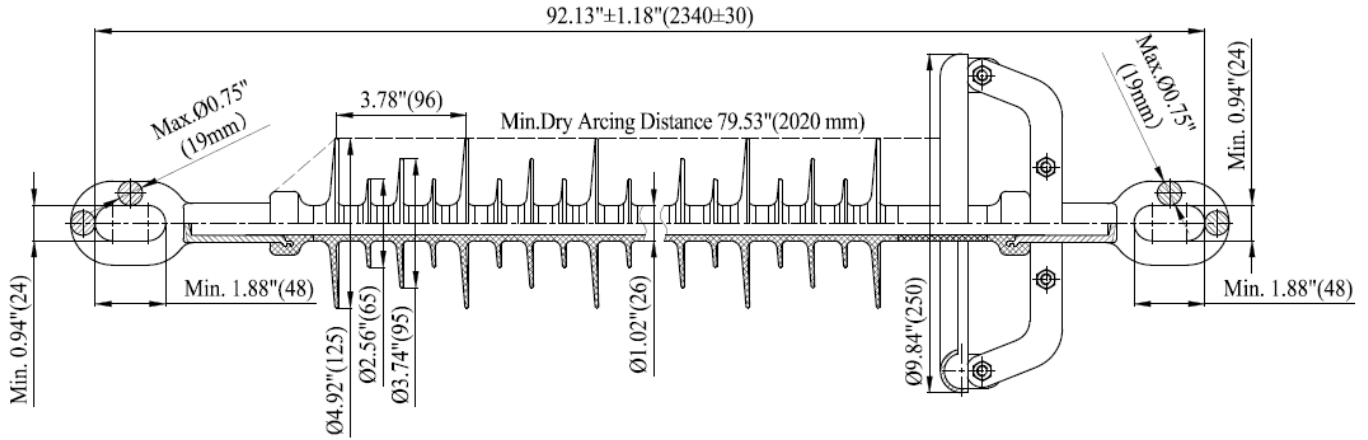

TECHNICAL SPECIFICATIONS:

SYSTEM VOLTAGE	kV	230
IMPULSE WITHSTAND	kV	1,050
60 HERTZ WITHSTAND, WET	kV	420
IMPULSE FLASHOVER, POSITIVE	kV	1,200
R.I.V. TEST VOLTAGE	kV	146
MAXIMUM R.I.V.	µV	500
LEAKAGE DISTANCE	mm	2,020
DRY ARCING DISTANCE	mm	6,470
SPECIFIED MECHANICAL LOAD (SML)	kN	111
ROUTINE TEST LOAD (RTL)	kN	55.5
NET WEIGHT	kg	6.3

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwalm at 12:18 pm, Sep 15, 2021



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

T111-EE-
2340-6470-LA

WAS T111-EE-2340-6470-AG 09-14-21

TM