

COMPOSITE SUSPENSION

CAT. NO. T111-YB-1654-4200-AA

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

DIMENSIONS

LEAKAGE DISTANCE	mm	4,200
DRY ARCING DISTANCE	mm	1,450

MECHANICAL VALUES


SPECIFIED MECHANICAL LOAD(SML)	kN	111
ROUTINE TEST LOAD(RTL)	kN	56

ELECTRICAL VALUES

RATED VOLTAGE	kV	138
60 HERTZ FLASHOVER, DRY	kV	535
60 HERTZ FLASHOVER, WET	kV	505
IMPULSE FLASHOVER	kV	870
IMPULSE WITHSTAND	kV	870

PACKING INFORMATION

NET WEIGHT	kg	5
------------	----	---

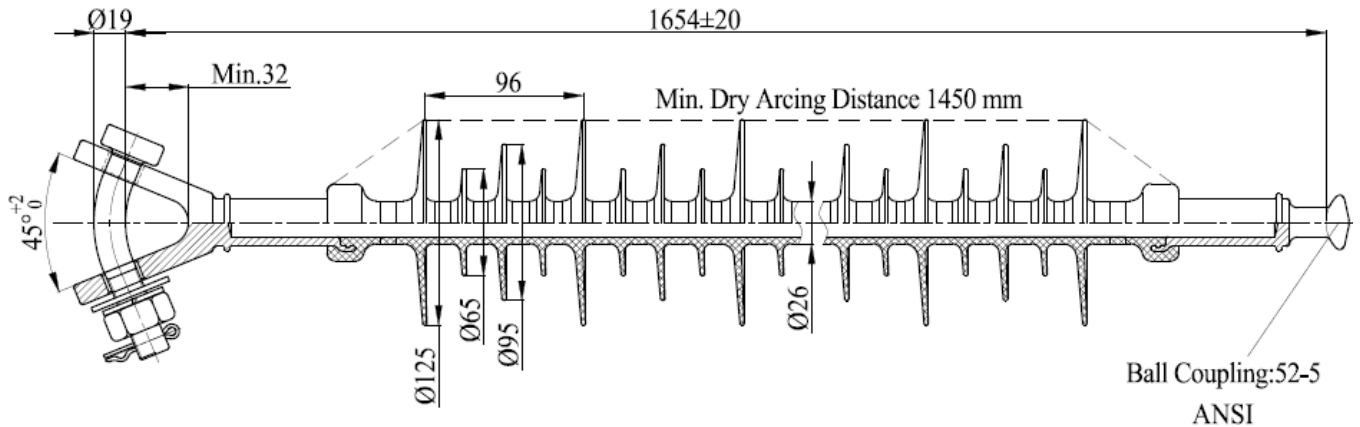

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwalm at 10:19 am, Dec 01, 2022



Victor Insulators, Inc.
280 Maple Avenue
Victor, New York 14564
Telephone: (585)924-2127
www.victorinsulators.com

T111-YB-
1654-4200-
AA

12-01-22

TM