

COMPOSITE SUSPENSION

CAT. NO. T111-YE-1567-3560-AA

DIMENSIONS

LEAKAGE DISTANCE	mm	3,560
DRY ARCING DISTANCE	mm	1,310

MECHANICAL VALUES

SPECIFIED MECHANICAL LOAD(SML)	kN	111.2
ROUTINE TEST LOAD(RTL)	kN	55.6

ELECTRICAL VALUES


RATED VOLTAGE	kV	138
LOW FREQUENCY FLASHOVER, DRY	kV	497
LOW FREQUENCY FLASHOVER, WET	kV	443
IMPULSE FLASHOVER, POSITIVE	kV	549
IMPULSE FLASHOVER, NEGATIVE	kV	898

PACKING INFORMATION

NET WEIGHT	kg	4.7
------------	----	-----

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

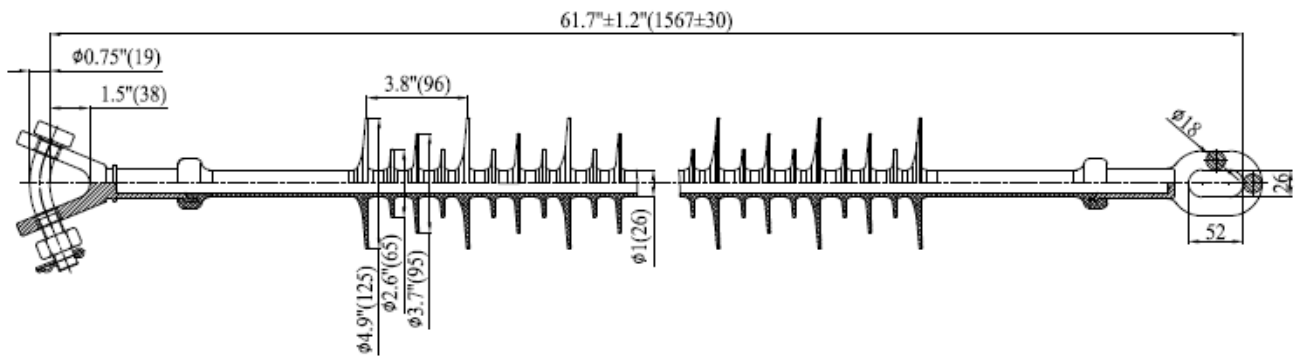

APPROVED
By A. E. Schwalm at 7:17 am, May 30, 2023



Victor Insulators, Inc.
280 Maple Avenue
Victor, New York 14564
Telephone: (585)924-2127
www.victorinsulators.com

T111-YE-
1567-3560-
AA

05-30-23

TM