

COMPOSITE SUSPENSION

CAT. NO. T112-BS-2044-3960-AG

- 1 ENG. MGR
- 2 ENG PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRDD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

DIMENSIONS

LEAKAGE DISTANCE mm 3,960
ANSI BALL AND SOCKET SIZE J

MECHANICAL VALUES


SPECIFIED MECHANICAL LOAD(SML) kN 112
ROUTING TEST LOAD(RTL) kN 56

ELECTRICAL VALUES

SYSTEM VOLTAGE kV 230
IMPULSE FLASHOVER, POSITIVE kV 1,105
IMPULSE FLASHOVER, NEGATIVE kV 1,105
60 HERTZ FLASHOVER, DRY kV 670
60 HERTZ FLASHOVER, WET kV 580

PACKING INFORMATION

NET WEIGHT kg 7.2

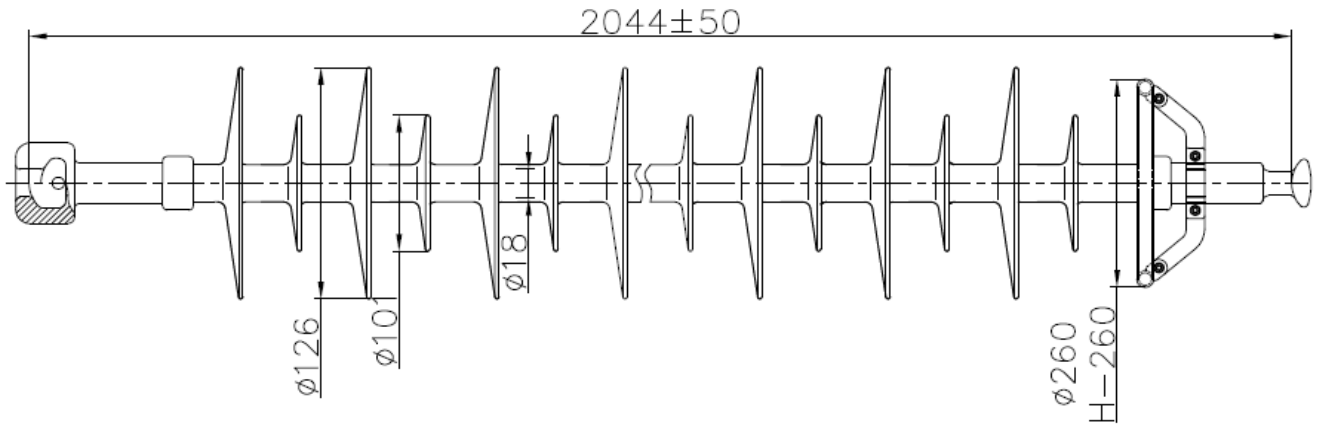

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwalm at 7:55 am, Feb 15, 2022

02-15-22		TM	
02-11-22		TM	



Victor Insulators, Inc.
280 Maple Avenue
Victor, New York 14564
Telephone: (585)924-2127
www.victorinsulators.com

T112-BS-
2044-3960-
AG