


COMPOSITE SUSPENSION

CAT. NO. T112-YB-1181-2890-AA

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

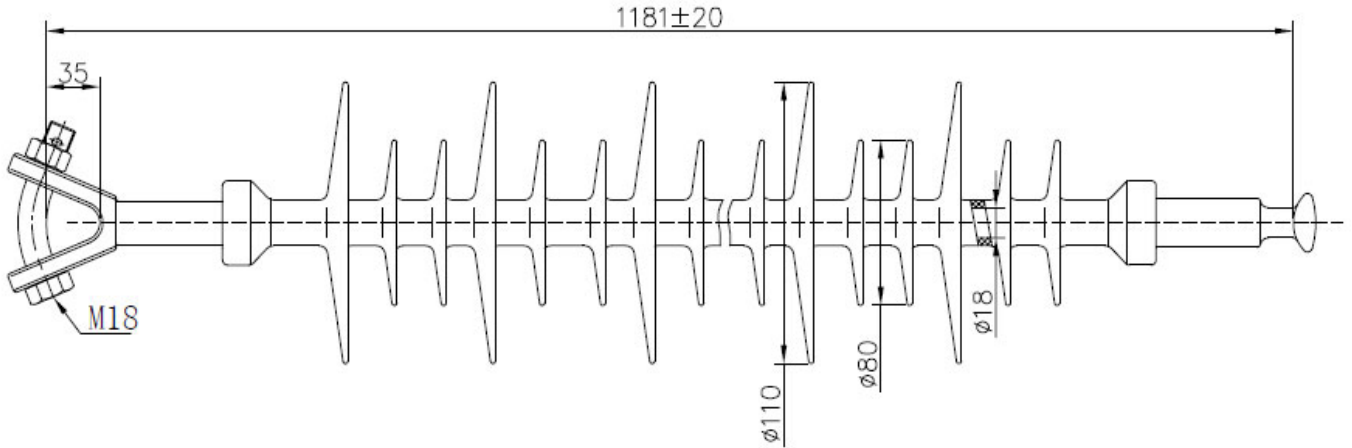

TECHNICAL SPECIFICATIONS:

SYSTEM VOLTAGE	kV	69
IMPULSE FLASHOVER, POSITIVE	kV	535
IMPULSE FLASHOVER, NEGATIVE	kV	565
60 HERTZ FLASHOVER, DRY	kV	355
60 HERTZ FLASHOVER, WET	kV	310
R.I.V. TEST VOLTAGE	kV	44
MAXIMUM R.I.V @ 1 MHZ	µV	200
LEAKAGE DISTANCE	mm	2,890
DRY ARCING DISTANCE	mm	980
SPECIFIED MECHANICAL LOAD (SML)	kN	112
ANSI BALL SIZE	J	
NET WEIGHT	kg	3.8

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
 By A. E. Schwalm at 1:42 pm, Jun 01, 2021



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

T112-YB-
 1181-2890-
 AA

05-27-21

TM