


COMPOSITE SUSPENSION

CAT. NO. T112-YB-947-2100-AA

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

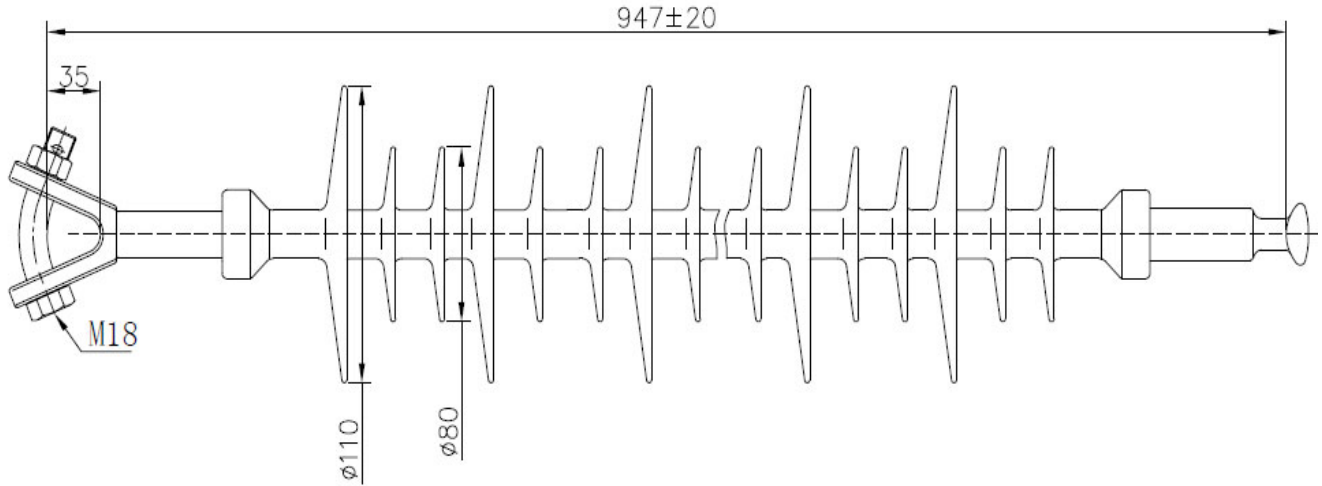

TECHNICAL SPECIFICATIONS:

SYSTEM VOLTAGE	kV	69
IMPULSE FLASHOVER, POSITIVE	kV	468
IMPULSE FLASHOVER, NEGATIVE	kV	503
60 HERTZ FLASHOVER, DRY	kV	269
60 HERTZ FLASHOVER, WET	kV	243
R.I.V. TEST VOLTAGE	kV	200
MAXIMUM R.I.V @ 1 MHZ	µV	44
LEAKAGE DISTANCE	mm	2,100
DRY ARCING DISTANCE	mm	750
SPECIFIED MECHANICAL LOAD (SML)	kN	112
ANSI BALL SIZE	J	
NET WEIGHT	kg	3.1

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwalm at 11:35 am, Jun 15, 2021

06-15-21

TM



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

T112-YB-947-
2100-AA