

COMPOSITE SUSPENSION

CAT. NO. T120-YB-871-1600-AA

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

DIMENSIONS

LEAKAGE DISTANCE	mm	1,600
DRY ARCING DISTANCE	mm	670
IEC BALL SIZE		16

MECHANICAL VALUES

SPECIFIED MECHANICAL LOAD(SML)	kN	120
ROUTING TEST LOAD(RTL)	kN	60


ELECTRICAL VALUES

SYSTEM VOLTAGE	kV	69
IMPULSE FLASHOVER, POSITIVE	kV	390
IMPULSE FLASHOVER, NEGATIVE	kV	410
60 HERTZ FLASHOVER, DRY	kV	245
60 HERTZ FLASHOVER, WET	kV	240

PACKING INFORMATION

NET WEIGHT	kg	2
------------	----	---

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

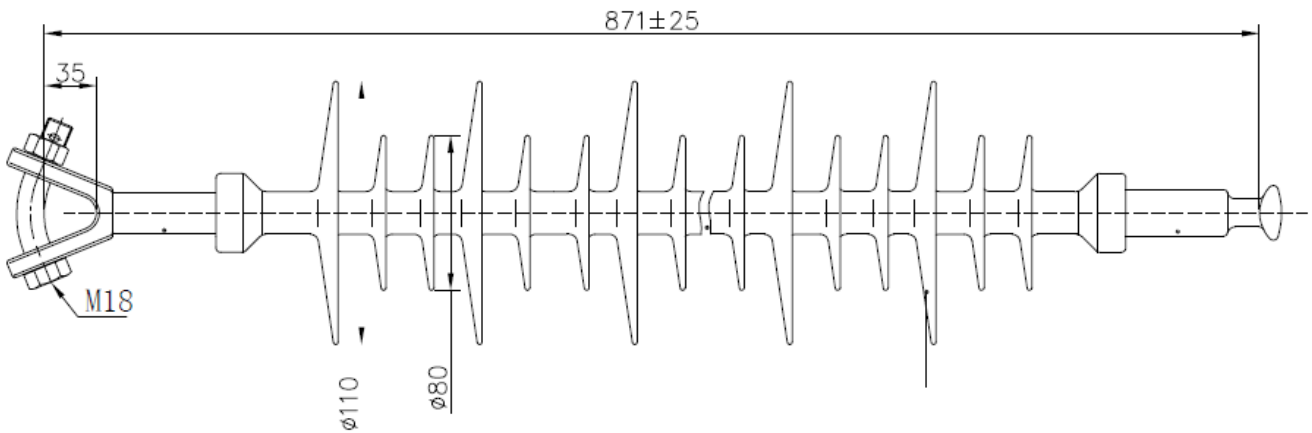

APPROVED
By A. E. Schwalm at 2:00 pm, Jun 14, 2022



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

T120-YB-871-
1600-AA

06-14-22

TM