


COMPOSITE SUSPENSION

CAT. NO. T133-YB-2780-6112-LA

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

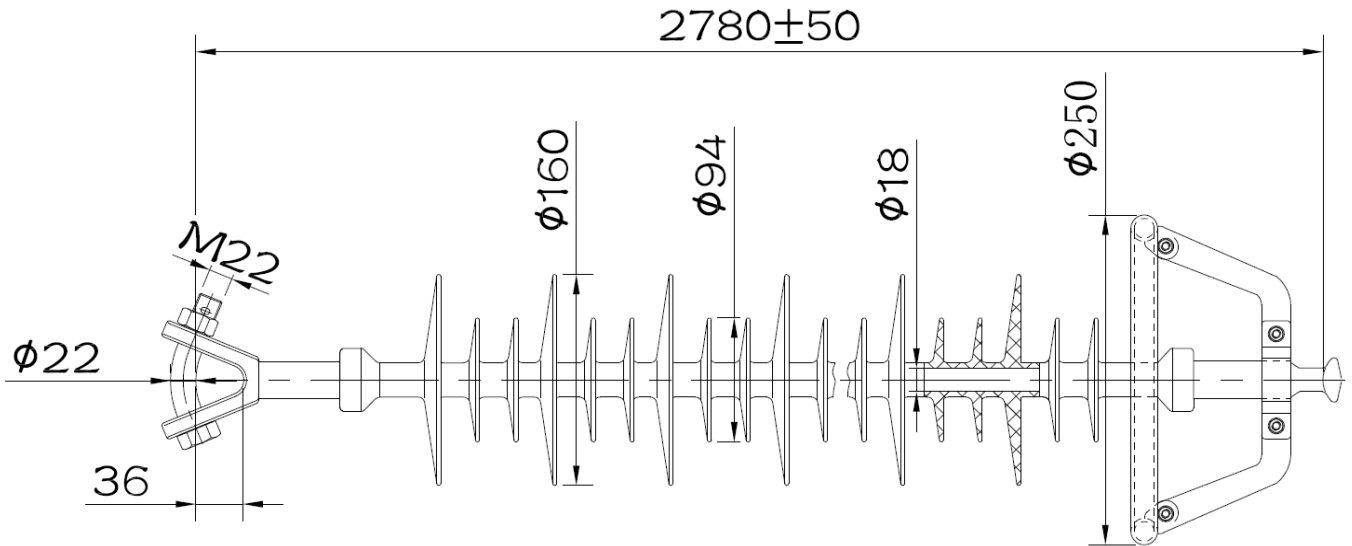

TECHNICAL SPECIFICATIONS:

SYSTEM VOLTAGE	kV	230
IMPULSE FLASHOVER, POSITIVE	kV	1,442
IMPULSE FLASHOVER, NEGATIVE	kV	1,481
60 HERTZ FLASHOVER, DRY	kV	780
60 HERTZ FLASHOVER, WET	kV	750
LEAKAGE DISTANCE	mm	6,112
DRY ARCING DISTANCE	mm	2,393
SPECIFIED MECHANICAL LOAD (SML)	kN	133
ANSI BALL SIZE		J

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwab at 12:24 pm, Sep 15, 2021



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

T133-YB-
2780-6112-LA