

COMPOSITE SUSPENSION

CAT. NO. T134-YB-1420-3500-XX

DIMENSIONS

LEAKAGE DISTANCE	mm	3,500
DRY ARCING DISTANCE	mm	1,100
ANSI BALL SIZE		J

MECHANICAL VALUES

SPECIFIED MECHANICAL LOAD(SML)	kN	134
ROUTING TEST LOAD(RTL)	kN	67


ELECTRICAL VALUES

SYSTEM VOLTAGE	kV	115
IMPULSE WITHSTAND	kV	550
IMPULSE FLASHOVER, POSITIVE	kV	605
IMPULSE FLASHOVER, NEGATIVE	kV	635
60 HERTZ FLASHOVER, DRY	kV	385
60 HERTZ FLASHOVER, WET	kV	320

PACKING INFORMATION

NET WEIGHT	kg	5
------------	----	---

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

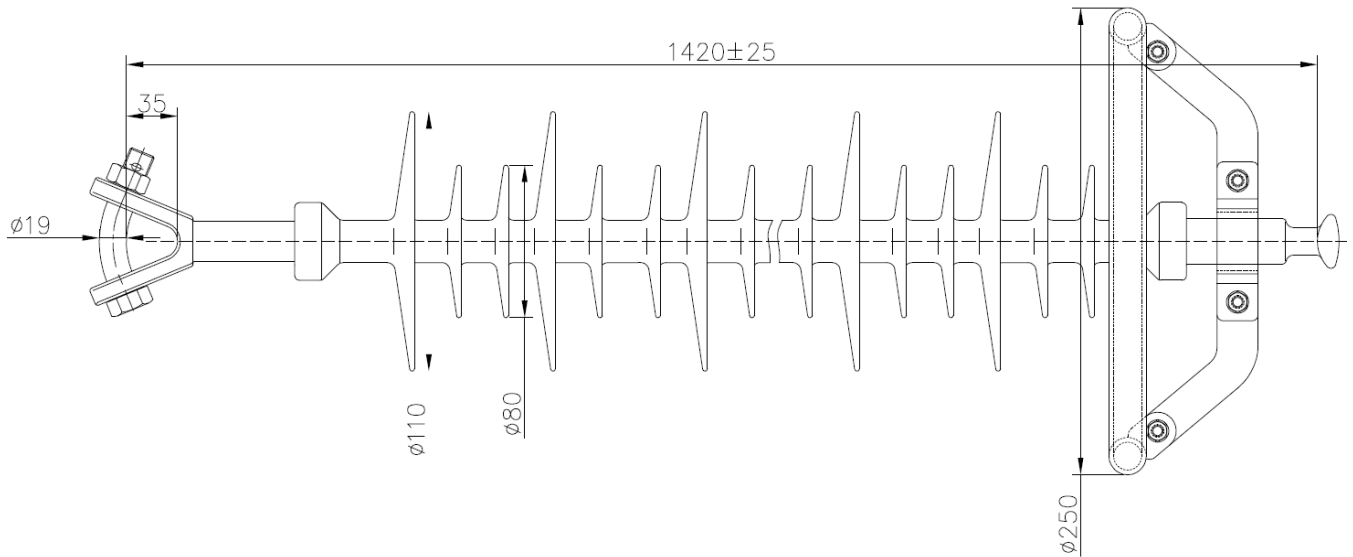

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwalm at 2:17 pm, Jun 21, 2022



Victor Insulators, Inc.
280 Maple Avenue
Victor, New York 14564
Telephone: (585)924-2127
www.victorinsulators.com

T134-YB-1420-3500-XX

06-13-22

TM