


COMPOSITE INSULATOR

CAT. NO. T222-SB-2713-7112-LG

**APPROVED**  
By A. E. Schwalm at 11:11 am, Sep 30, 2020

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

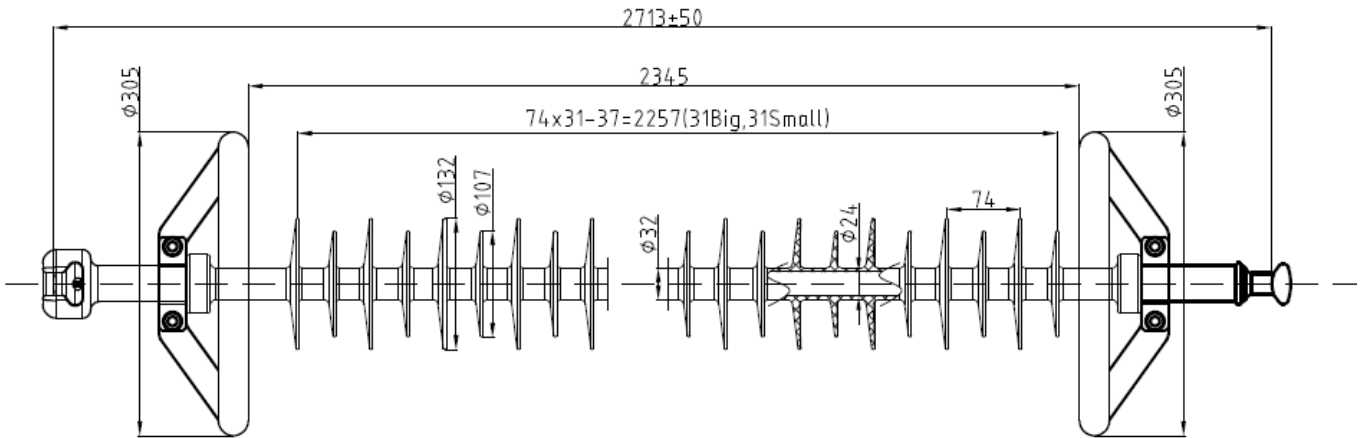

TECHNICAL SPECIFICATIONS:

RATED VOLTAGE	kV	345
IMPULSE FLASHOVER, POSITIVE	kV	1,292
IMPULSE FLASHOVER, NEGATIVE	kV	1,360
60 HERTZ FLASHOVER, DRY	kV	830
60 HERTZ FLASHOVER, WET	kV	790
LEAKAGE DISTANCE	mm	7,112
DRY ARCING DISTANCE	mm	2,402
SPECIFIED MECHANICAL LOAD(SML)	kN	222
WEIGHT	kg	12.76

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

08-04-20

TM



**Victor Insulators, Inc.**  
280 Maple Avenue  
Victor, New York 14564  
Telephone: (585)924-2127  
www.victorinsulators.com

T222-SB-  
2713-7112-  
LG