


COMPOSITE INSULATOR

CAT. NO. T222-SB-3227-9670-LG

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

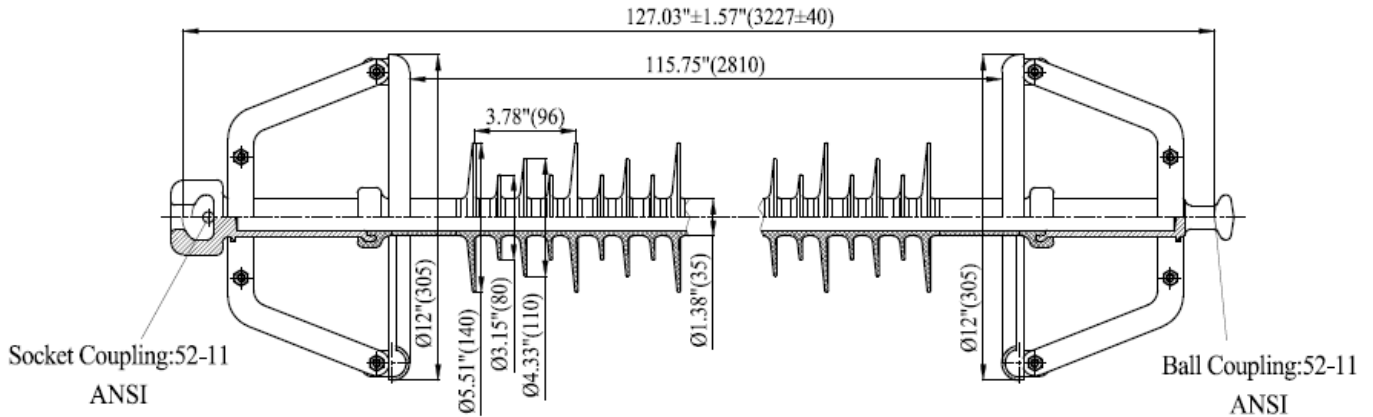

TECHNICAL SPECIFICATIONS:

SYSTEM VOLTAGE	kV	345
LEAKAGE DISTANCE	mm	9,670
DRY ARC DISTANCE	mm	2,810
60 HERTZ FLASHOVER, DRY	kV	925
60 HERTZ FLASHOVER, WET	kV	1,015
IMPULSE FLASHOVER, POSITIVE	kV	1,725
IMPULSE FLASHOVER, NEGATIVE	kV	1,755
SPECIFIED MECHANICAL LOAD(SML)	kN	222
ROUTING TEST LOAD(RTL)	kN	111
WEIGHT	kg	15.2

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

**APPROVED**

By A. E. Schwalm at 3:19 pm, Sep 08, 2020



**Victor Insulators, Inc.**

280 Maple Avenue  
Victor, New York 14564  
Telephone: (585)924-2127  
www.victorinsulators.com

T222-SB-  
3227-9670-  
LG

09-04-20

TM