


COMPOSITE SUSPENSION

CAT. NO. T222-YB-1741-3455-AA

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

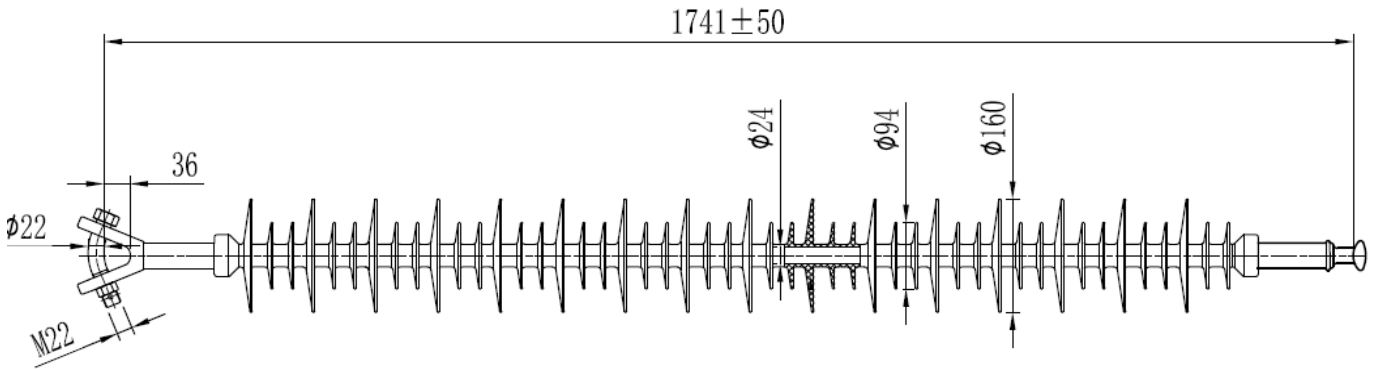

TECHNICAL SPECIFICATIONS:

SYSTEM VOLTAGE	kV	161
IMPULSE FLASHOVER, POSITIVE	kV	805
IMPULSE FLASHOVER, NEGATIVE	kV	820
60 HERTZ FLASHOVER, DRY	kV	545
60 HERTZ FLASHOVER, WET	kV	505
R.I.V. TEST VOLTAGE	kV	102
MAXIMUM R.I.V. @ 1MHZ	μV	500
LEAKAGE DISTANCE	mm	3,455
DRY ARCING DISTANCE	mm	1,397
SPECIFIED MECHANICAL LOAD (SML)	kN	222
NET WEIGHT	kg	9.2

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
By A. E. Schwalm at 10:52 am, Sep 16, 2020

09-16-20

TM



Victor Insulators, Inc.
280 Maple Avenue
Victor, New York 14564
Telephone: (585)924-2127
www.victorinsulators.com

T222-YB-
1741-3455-
AA