

STATION POST

CAT. NO. PSP-288P

138 kV 650 kV BIL

ANSI PSP-288P

DIMENSIONS:

LEAKAGE DISTANCE IN 116

MECHANICAL VALUES:

CANTILEVER STRENGTH LB 1,400
 TENSION STRENGTH LB 17,500
 TORSION STRENGTH IN-LB 14,000
 COMPRESSION STRENGTH LB 17,500

ELECTRICAL VALUES:


IMPULSE FLASHOVER-POSITIVE kV 710
 60 HERTZ WITHSTAND-WET kV 275
 IMPULSE WITHSTAND kV 650

RADIO INFLUENCE VOLTAGE DATA:

60 HERTZ TEST VOLTAGE TO GROUND kV 88
 MAXIMUM R.I.V. @ 1000 kHz μ V 200

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

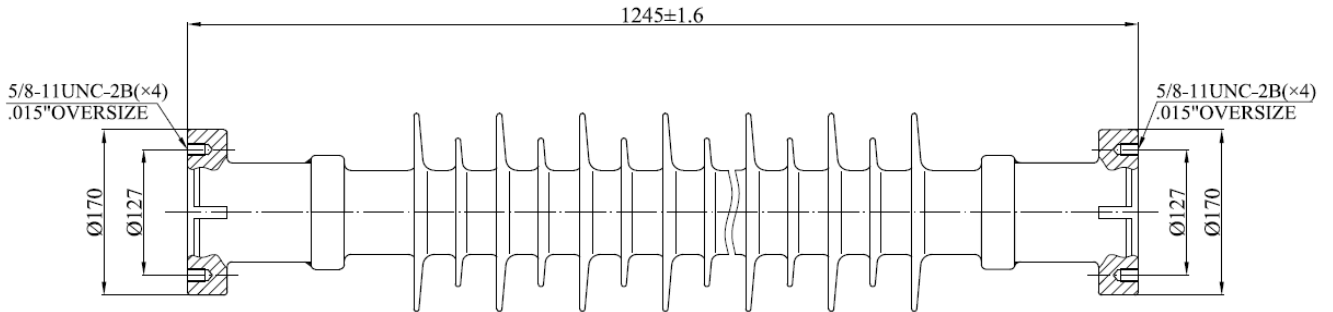

APPROVED
 By A. E. Schwalm at 7:10 am, Dec 31, 2017



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

PSP-288P

12-29-17

TM