

STATION POST

CAT. NO. PSP-304P

230 kV 900 kV BIL

ANSI PSP-304P

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

DIMENSIONS:

LEAKAGE DISTANCE mm 4,191
 DRY ARCING DISTANCE mm 1,910

MECHANICAL VALUES:

SPECIFIED CANTILEVER STRENGTH(SCL) kN 4.2
 MAX DESIGN CANTILEVER LOAD(MDCL) kN 1.7
 TENSION STRENGTH(STL) kN 2
 TORSION STRENGTH(SToL) kN-M 77.8
 COMPRESSION STRENGTH(SCoL) kN 77.8

ELECTRICAL VALUES:

IMPULSE FLASHOVER-POSITIVE kV 1,010
 60 HERTZ WITHSTAND-WET kV 385
 IMPULSE WITHSTAND kV 900


RADIO INFLUENCE VOLTAGE DATA:

60 HERTZ TEST VOLTAGE TO GROUND kV 146
 MAXIMUM R.I.V. @ 1000 kHz μV 500

PACKING INFORMATION:

NET WEIGHT, EACH kg 33.8

THIS DRAWING IS THE PROPERTY OF VICTOR INSULATORS, INC. AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED, USED, OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY VICTOR INSULATORS, INC.

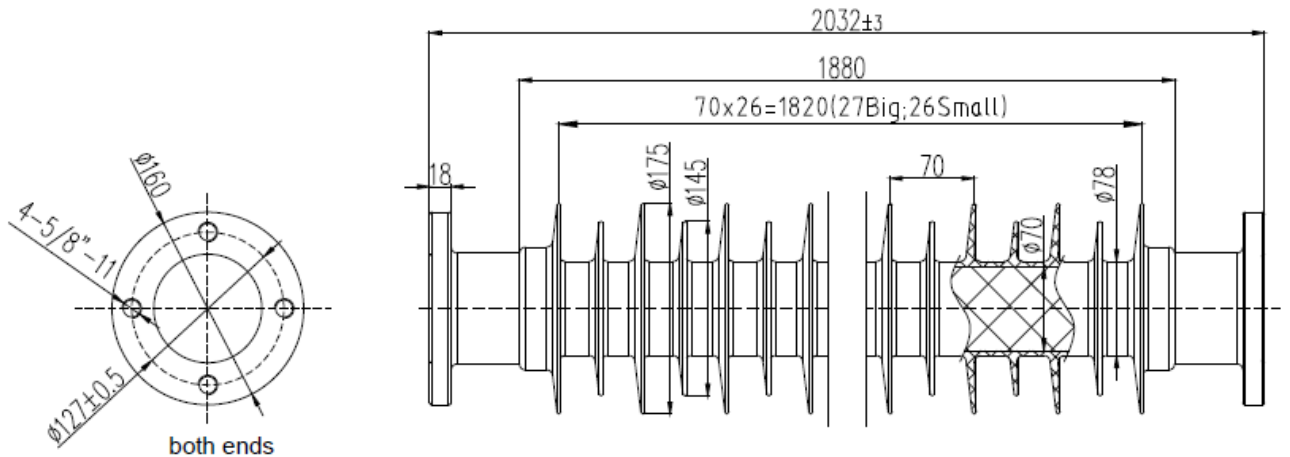

APPROVED
 By A. E. Schwalm at 9:17 am, Jun 16, 2021

06-16-21	TM
12-03-14	TM



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

PSP-304P